

In-Finity 100 Surface 3000K General Lighting Dali

N10S253G30BDA - White


LED modular system for surface installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Main specifications			
Lamp category Power (W) CCT (K) CRI Net lumen (lm)	LED 25.5W/m 3000K 80 7001	Mountings Environment	Surface Indoor dry location
Optical			
Lighting type LED type Light distribution Optical type Beam angle (°) Beam angle C90-270 (°)	Direct Top LED Symmetric Diffused light 103 107	90° 60° 30° 2644 cd Luminous flux lu 7001 lm	
Electrical			
Frequency (Hz) Dimmable Driver Driver type Emergency	50/60 Yes Integrated Dimmable DALI 1 Without	Insulation class	I
Physical			
Color Orientation Weight (kg) Length (mm)	White Fixed 18.80 2530		

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 100 Surface 3000K General Lighting Dali

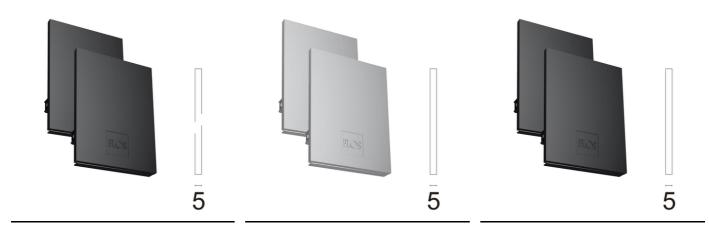

Metal cover. Surface / Suspension Down. 100 mm 08.9054.06

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 100 mm (Colour Anodized Grey) 08.9054.02

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 100 mm (Colour Black) 08.9054.NS





500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room 08.0111.00 Metal End Cap. Recessed No Trim / Surface / Suspension Down. 100 mm (Colour White) 08.9054.40