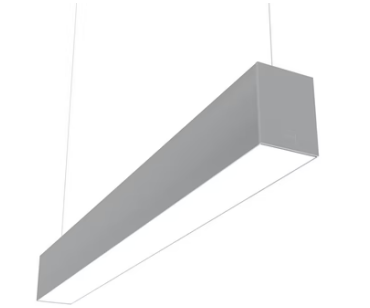



In-Finity 100 Suspension Up & Down 3000K General Lighting

N10U113G02B - Anodized Grey

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.

Main specifications

Number of heads	1	**Net lumen (lm)**	4148
Lamp category	LED	**Mountings**	Suspension
Power (W)	38.5W/m	**Environment**	Indoor dry location
CCT (K)	3000K		
CRI	80		

Optical

Lighting type	Indirect, Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	103
Beam angle C90-270 (°)	107



Luminous flux luminaire
4148 lm

Beam Angle DIR: 103°

h(m)	E(lx)	D(m)
1	1138	2.54
2	284	5.07
3	126	7.61
4	71	10.14
5	46	12.68

Electrical

Frequency (Hz)	50/60	**Insulation class**	I
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		
Emergency	Without		

Physical

Color	Anodized Grey
Orientation	Fixed
Weight (kg)	7.40
Length (mm)	1125

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-FInity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 100 Suspension Up & Down 3000K General Lighting

Power supply rose
08.0031.00

Metal cover. Suspension Up & Down. 100 mm (Colour Anodized Grey)
08.9058.02

500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room
08.0111.00

Metal cover. Suspension Up & Down. 100 mm
08.9058.06

Metal cover. Suspension Up & Down. 100 mm (Colour Black)
08.9058.NS

Metal cover. Suspension Up & Down. 100 mm (Colour White)
08.9058.40

Suspension kit
08.0030