



In-Finity 100 Suspension Up & Down Emergency 3000K Micro-Prismatic Diffuser

■ N10UEM3U02B - Anodized Grey

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.

Main specifications			
Lamp category Power (W) CCT (K) CRI Mountings	LED 38.5W/m 3000K 80 Suspension	Environment	Indoor dry location
Optical			
Lighting type LED type Light distribution Optical type	Indirect, Direct Top LED Symmetric Diffused light		
Electrical			
Dimmable Driver Driver type Emergency Insulation class	No Integrated Non Dimmable Without I		
Physical			
Color	Anodized Grey		

Note

Orientation


Length (mm)

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

Fixed

1400

In-Finity 100 Suspension Up & Down Emergency 3000K Micro-Prismatic Diffuser

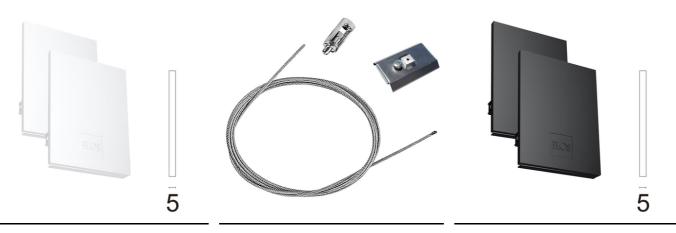

Metal cover. Suspension Up & Down. 100 mm (Colour White) 08.9058.40

Suspension kit 08.0030

Metal cover. Suspension Up & Down. 100 mm (Colour Black) 08.9058.NS



Power supply rose

08.0031.00

Metal cover. Suspension Up & Down. 100 mm (Colour Anodized Grey)



08.9058.02

500 mm micro-prismatic diffuser. Highly efficient multilayer diffuser that, thanks to its unique microprismatic texture, provides a glare free UGR<19 light beam 08.0114.00



Metal cover. Suspension Up & Down. 100 mm

