


In-Finity 100 Suspension Up & Down Flat Corner 3000K General Lighting Dali

■ N10UFC3G02BDA - Anodized Grey

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.

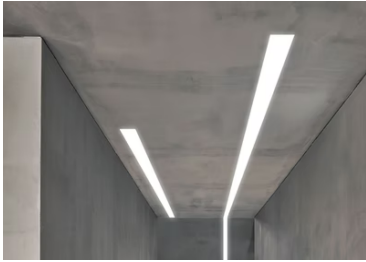


Main specifications

Number of heads	1	Net lumen (lm)	4148
Lamp category	LED	Mountings	Suspension
Power (W)	38.5W/m	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

Optical


Lighting type	Indirect, Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	103
Beam angle C90-270 (°)	107



Beam Angle DIR: 103°

h(m)	E(lx)	D(m)
1	1138	2.54
2	284	5.07
3	126	7.61
4	71	10.14
5	46	12.68

Luminous flux luminaire
4148 lm



Electrical


Frequency (Hz)	50/60	Insulation class	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Dimmable DALI		
	1		
Emergency	Without		

Physical

Color	Anodized Grey
Orientation	Fixed
Weight (kg)	8.20

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 100 Suspension Up & Down Flat Corner 3000K General Lighting Dali



5

Metal cover. Suspension Up & Down.
100 mm (Colour White)
08.9058.40



5

Metal cover. Suspension Up & Down.
100 mm (Colour Black)
08.9058.NS



5

Metal cover. Suspension Up & Down.
100 mm (Colour Anodized Grey)
08.9058.02



500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room
08.0111.00



5

Metal cover. Suspension Up & Down.
100 mm
08.9058.06



Suspension kit
08.0030



Power supply rose. Dali
08.0031.00.DA