


## In-Finity 100 Suspension Up & Down Flat Corner 3000K General Lighting Dali

■ N10UFC3G30BDA - White

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.

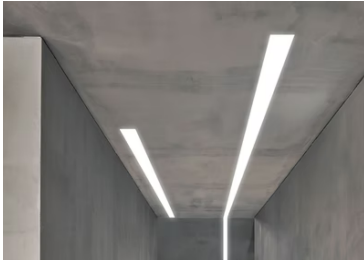


### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	4148
<b>Lamp category</b>	LED	<b>Mountings</b>	Suspension
<b>Power (W)</b>	38.5W/m	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	80		

### Optical


<b>Lighting type</b>	Indirect, Direct
<b>LED type</b>	Top LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Diffused light
<b>Beam angle (°)</b>	103
<b>Beam angle C90-270 (°)</b>	107

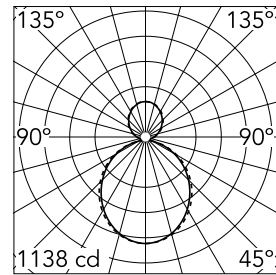

Beam Angle DIR: 103°

h(m)	E(lx)	D(m)
1	1138	2.54
2	284	5.07
3	126	7.61
4	71	10.14
5	46	12.68

Luminous flux luminaire  
4148 lm



### Electrical


<b>Frequency (Hz)</b>	50/60	<b>Insulation class</b>	I
<b>Dimmable</b>	Yes		
<b>Driver</b>	Integrated		
<b>Driver type</b>	Dimmable DALI		
	1		
<b>Emergency</b>	Without		

### Physical

<b>Color</b>	White
<b>Orientation</b>	Fixed
<b>Weight (kg)</b>	8.20

### Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



# In-Finity 100 Suspension Up & Down Flat Corner 3000K General Lighting Dali



5

Metal cover. Suspension Up & Down.  
100 mm (Colour White)  
08.9058.40



Suspension kit  
08.0030



5

Metal cover. Suspension Up & Down.  
100 mm  
08.9058.06



Power supply rose. Dali  
08.0031.00.DA



5

Metal cover. Suspension Up & Down.  
100 mm (Colour Black)  
08.9058.NS



5

Metal cover. Suspension Up & Down.  
100 mm (Colour Anodized Grey)  
08.9058.02



500 mm opal diffuser. Diffuse, glare  
free and uniform lighting throughout  
the room  
08.0111.00