



In-Finity 35 Recessed No Trim Flat Corner 4000K Micro-Prismatic Diffuser

■ N35NFC4U30B - White

LED modular system for recessed No Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

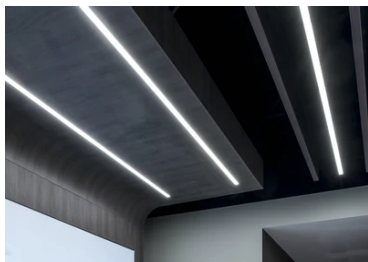


Main specifications

| | | | |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 1107 |
| Lamp category | LED | Mountings | Recessed no trim |
| Power (W) | 22.5W | Environment | Indoor dry location |
| CCT (K) | 4000K | | |
| CRI | 80 | | |

Optical

| | |
|------------------------|----------------|
| Lighting type | Direct |
| LED type | Top LED |
| Light distribution | Symmetric |
| Optical type | Diffused light |
| Beam angle (°) | 76 |
| Beam angle C90-270 (°) | 64 |

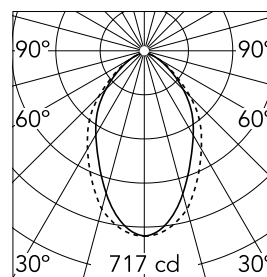

Luminous flux luminaire
1107 lm

| | | | |
|-------------|-------------|--------------|-------------|
| Beam Angle: | 75° | | |
| | <u>h(m)</u> | <u>E(lx)</u> | <u>D(m)</u> |
| | 1 | 717 | 1.25 |
| | 2 | 179 | 2.50 |
| | 3 | 80 | 3.76 |
| | 4 | 45 | 5.01 |
| | 5 | 29 | 6.26 |

Electrical

| | | | |
|----------------|--------------|------------------|---------|
| Frequency (Hz) | 50/60 | Emergency | Without |
| Voltage (V) | 220.00 | Insulation class | I |
| Dimmable | No | | |
| Driver | Integrated | | |
| Driver type | Non Dimmable | | |


Physical

| | |
|---------------------|-------|
| Color | White |
| Orientation | Fixed |
| Recessed depth (mm) | 120 |
| Weight (kg) | 3.16 |
| Length (mm) | 568 |

Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 35 Recessed No Trim Flat Corner 4000K Micro-Prismatic Diffuser

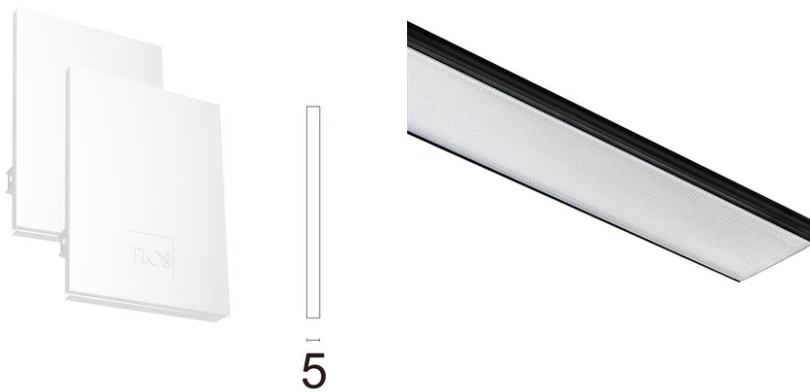

Metal End Cap. Recessed No Trim /
Surface / Suspension Down. 35 mm
(Colour White)
08.9050.40

500 mm micro-prismatic diffuser.
Highly efficient multilayer diffuser
that, thanks to its unique
microprismatic texture, provides a
glare free UGR<19 light beam
08.0112.00