

## In-Finity 35 Recessed Trim 3000K Micro-Prismatic Diffuser

■ N35T053U30B - White


LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

### Main specifications

Number of heads	1	Net lumen (lm)	511
Lamp category	LED	Mountings	Recessed trim
Power (W)	13W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

### Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	76
Beam angle C90-270 (°)	64



Beam Angle: 75°

h(m) E(lx) D(m)

1	331	1.25
2	83	2.50
3	37	3.76
4	21	5.01
5	13	6.26

Luminous flux luminaire  
511 lm

### Electrical




Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	I
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		

### Physical

Color	White	Length (mm)	565
Orientation	Fixed		
Trim	yes		
Recessed depth (mm)	120		
Weight (kg)	1.28		

### Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

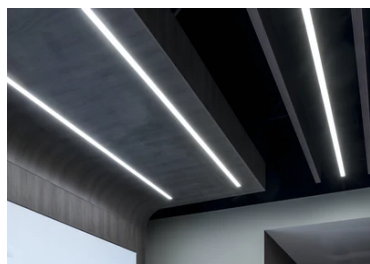

## In-Finity 35 Recessed Trim 3000K Micro-Prismatic Diffuser



5



5

500 mm micro-prismatic diffuser.  
Highly efficient multilayer diffuser  
that, thanks to its unique  
microprismatic texture, provides a  
glare free UGR<19 light beam  
08.0112.00

Metal cover. Recessed Trim. 35 mm  
(Colour White)  
08.9051.40

Metal cover. Recessed Trim. 35 mm  
(Colour Anodized Grey)  
08.9051.02



5

Metal cover. Recessed Trim. 35 mm  
(Colour Black)  
08.9051.NS