

In-Finity 35 Recessed Trim 4000K General Lighting Dali N35T194G14BDA - Black


LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Main specifications Number of heads Lamp category Power (W) CCT (K) CRI	1 LED 41W 4000K 80	Net lumen (lm) Mountings Environment	2491 Recessed trim Indoor dry location
Optical Lighting type LED type Light distribution Optical type Beam angle (°) Beam angle C90-270 (°)	Direct Top LED Symmetric Diffused light 110 110	90° 60° 30° 916 cd Luminous flux lu 2491 lm	Beam Angle: 107° h(m) E(lx) D(m) 1 916 2.63 2 229 5.26 3 102 7.90 4 57 10.53 5 37 13.16 Iminaire
Electrical Frequency (Hz) Voltage (V) Dimmable Driver Driver type	50/60 220.00 Yes Integrated Dimmable DALI 1	Emergency Insulation class	Without I
Physical Color Orientation Trim Recessed depth (mm) Weight (kg)	Black Fixed yes 120 4.48	Length (mm)	1970

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 35 Recessed Trim 4000K General Lighting Dali

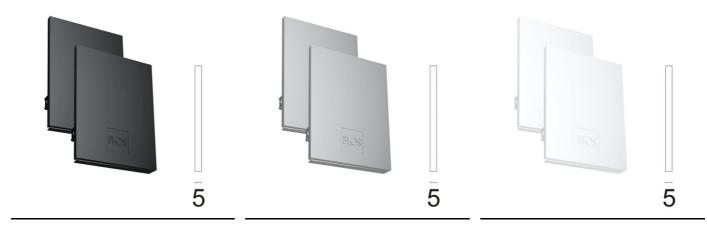

Metal cover. Recessed Trim. 35 mm (Colour Black) 08.9051.NS

Metal cover. Recessed Trim. 35 mm (Colour Anodized Grey) 08.9051.02

Metal cover. Recessed Trim. 35 mm (Colour White) 08.9051.40



500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room 08.0109.00