

## In-Finity 35 Recessed Trim Emergency 3000K Micro-Prismatic Diffuser

■ N35TEM3U30B - White

LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

### Main specifications

Number of heads	1	Net lumen (lm)	1278
Lamp category	LED	Mountings	Recessed trim
Power (W)	28W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

### Optical

Lighting type	Direct	Beam angle C90-270 (°)	64
LED type	Top LED		
Light distribution	Symmetric		
Optical type	Diffused light		
Beam angle (°)	76		

### Electrical



Voltage (V)	220.00	Insulation class	I
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		
Emergency	With		

### Physical

Color	White
Orientation	Fixed
Recessed depth (mm)	120
Weight (kg)	3.19
Length (mm)	1405

### Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

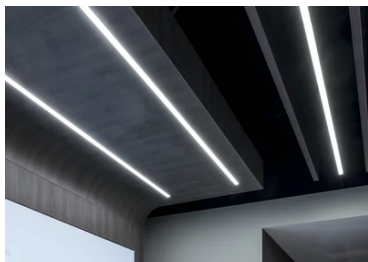

## In-Finity 35 Recessed Trim Emergency 3000K Micro-Prismatic Diffuser



5

---

Metal cover. Recessed Trim. 35 mm  
(Colour White)  
08.9051.40



5

---

Metal cover. Recessed Trim. 35 mm  
(Colour Black)  
08.9051.NS



---

500 mm micro-prismatic diffuser.  
Highly efficient multilayer diffuser  
that, thanks to its unique  
microprismatic texture, provides a  
glare free UGR<19 light beam  
08.0112.00



5

---

Metal cover. Recessed Trim. 35 mm  
(Colour Anodized Grey)  
08.9051.02