

In-Finity 35 Recessed Trim Flat Corner 4000K General Lighting N35TFC4G02B - Anodized Grey


LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Main specifications Number of heads Lamp category Power (W) CCT (K) CRI	1 LED 22.5W 4000K 80	Net lumen (lm) Mountings Environment	1424 Recessed trim Indoor dry location
Optical Lighting type LED type Light distribution Optical type Beam angle (°) Beam angle C90-270 (°)	Direct Top LED Symmetric Diffused light 110 110	90° 60° 30° 523 cd Luminous flux lu 1424 lm	Beam Angle: 107° h(m) E(k) D(m) 1 523 2.63 2 131 5.26 3 58 7.90 4 33 10.53 5 21 13.16 uminaire
Electrical Frequency (Hz) Voltage (V) Dimmable Driver Driver type Physical Color Orientation Trim Recessed depth (mm)	50/60 220.00 No Integrated Non Dimmable Anodized Grey Fixed yes 120	Emergency Insulation class Length (mm)	Without I

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 35 Recessed Trim Flat Corner 4000K General Lighting

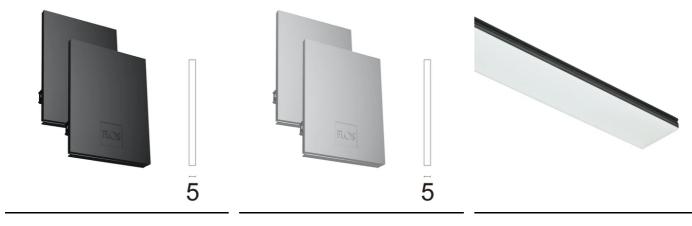

Metal cover. Recessed Trim. 35 mm (Colour Black) 08.9051.NS

Metal cover. Recessed Trim. 35 mm (Colour Anodized Grey) 08.9051.02

500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room 08.0109.00



Metal cover. Recessed Trim. 35 mm (Colour White) 08.9051.40