




L []]£8 35 38



In-Finity 35 Surface 4000K Micro-Prismatic Diffuser Dali N35S054U14BDA - Black


LED modular system for surface installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Main specifications Number of heads Lamp category Power (W) CCT (K) CRI	1 LED 13W 4000K 80	Net lumen (lm) Mountings Environment	553 Surface Indoor dry l	ocation	
Optical					
Lighting type LED type Light distribution Optical type Beam angle (°) Beam angle C90-270 (°)	Direct Top LED Symmetric Diffused light 76 64	90° 60° 30° 359 cd Luminous flux lut 553 lm	90° 60° 30°	Beam Angle: h(m) E(lx) 1 359 2 90 3 40 4 22 5 14	75° D(m) 1.25 2.50 3.76 5.01 6.26
Electrical					
Frequency (Hz) Voltage (V) Dimmable Driver Driver type	50/60 220.00 Yes Integrated Dimmable DALI 1	Emergency Insulation class	Without I		
Physical					
Color Orientation Weight (kg) Length (mm)	Black Fixed 1.28 565				

Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 35 Surface 4000K Micro-Prismatic Diffuser Dali

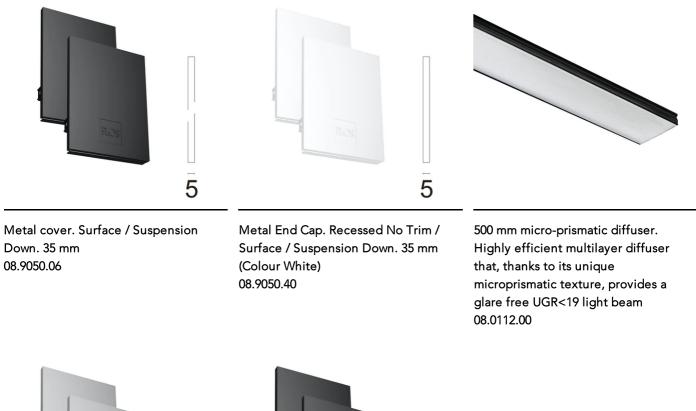





Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour Anodized Grey) 08.9050.02 Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour Black) 08.9050.NS