



L []]120 355 338

<b>K</b> 03	V	<b>I</b> P 20	EAC	CE	RETILAP
GWT 850°		<u> </u>			

## In-Finity 35 Suspension Down 3000K General Lighting Dali N35D143G02BDA - Anodized Grey


LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit not included.

Main specifications Number of heads Lamp category Power (W) CCT (K) CRI	1 LED 28W 3000K 80	Net lumen (lm) Mountings Environment	1643 Suspension Indoor dry location		
Optical Lighting type LED type Light distribution Optical type Beam angle (°) Beam angle C90-270 (°)	Direct Top LED Symmetric Diffused light 110 110	90° 60° 30° 604 cd Luminous flux I 1643 lm	90°. 60°. 30° uminaire	Beam Angle: 107°   h(m) E(lx) D(m)   1 604 2.63   2 151 5.26   3 67 7.90   4 38 10.53   5 24 13.16	
Electrical Frequency (Hz) Voltage (V) Dimmable Driver Driver type	50/60 220.00 Yes Integrated Dimmable DALI 1	Emergency Insulation class	Without I		
Physical Color Orientation Weight (kg) Length (mm)	Anodized Grey Fixed 3.19 1405				

## Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

## In-Finity 35 Suspension Down 3000K General Lighting Dali

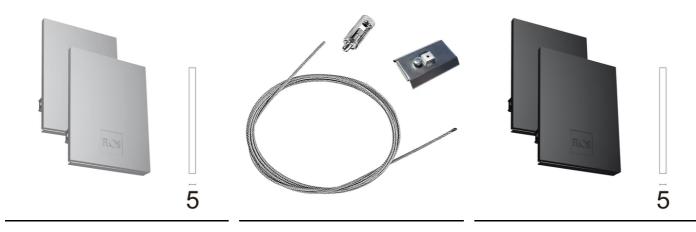

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour Anodized Grey) 08.9050.02 Suspension kit 08.0030

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour Black) 08.9050.NS



Metal cover. Surface / Suspension Down. 35 mm 08.9050.06

5



Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour White) 08.9050.40



500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room 08.0109.00



Power supply rose. Dali 08.0031.00.DA