

K 03	V	І Р 20	EAC	CE	RETILAP
GWT 850°					

In-Finity 35 Suspension Down 4000K General Lighting Dali N35D164G30BDA - White


LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit not included.

Main specifications Number of heads Lamp category Power (W) CCT (K) CRI	1 LED 35.5W 4000K 80	Net lumen (lm) Mountings Environment	2135 Suspension Indoor dry location		
Optical Lighting type LED type Light distribution Optical type Beam angle (°) Beam angle C90-270 (°)	Direct Top LED Symmetric Diffused light 110 110	90°	90°. 60°.	Beam Angle: 107° h(m) E(lx) D(m) 1 785 2.63 2 196 5.26 3 87 7.90 4 49 10.53	
Electrical		<u>30° ∕ 785</u> cd Luminous flux 2135 lm	X	5 31 13.16	
Frequency (Hz) Voltage (V) Dimmable Driver Driver type	50/60 220.00 Yes Integrated Dimmable DALI 1	Emergency Insulation class	Without I		
Physical					
Color Orientation Weight (kg) Length (mm)	White Fixed 3.84 1690				

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 35 Suspension Down 4000K General Lighting Dali

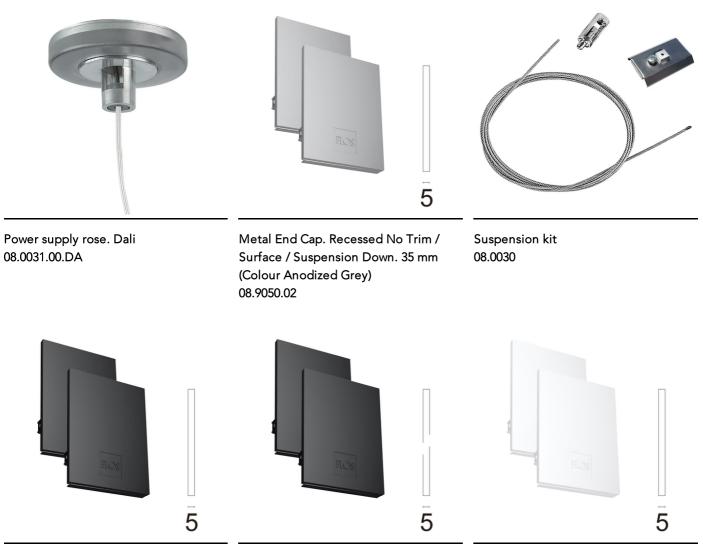

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour Black) 08.9050.NS Metal cover. Surface / Suspension Down. 35 mm 08.9050.06

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour White) 08.9050.40



500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room