





N35D054G02B - Anodized Grey

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit not included.

Main specifications

Number of heads	1
Lamp category	LED
Power (W)	13W
CCT (K)	4000K
CRI	80

Net lumen (lm) Mountings Environment

Suspension Indoor dry location








83



•	
Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	110
Beam angle C90-270 (°)	110



Luminous flux luminaire 712 lm

Beam Angle:		107°
h(m)	E(lx)	D(m)
1	262	2.63
2	65	5.26
3	29	7.90
4	16	10.53
5	10	13.16

Electrical

Optical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	I
Dimmable	No		
Driver	Integrated		

Non Dimmable

Physical


Driver type

Color	Anodized Grey
Orientation	Fixed
Weight (kg)	1.28
Length (mm)	565

Note

 $Opal\ Diffuser:\ Diffuse,\ glare\ free\ and\ uniform\ lighting\ throughout\ the\ room.\ /\ Emergency:\ Emergency\ Module$ available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 35 Suspension Down 4000K General Lighting

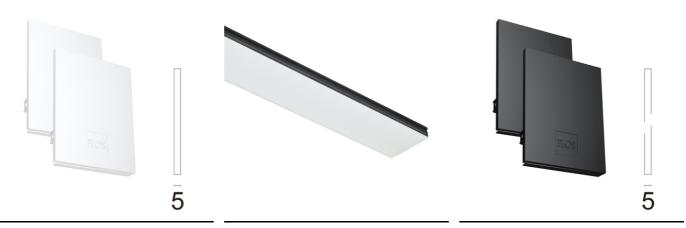

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour White) 08.9050.40

500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room 08.0109.00

Metal cover. Surface / Suspension Down. 35 mm 08.9050.06



Power supply rose 08.0031.00



Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour Anodized Grey) 08.9050.02



Suspension kit 08.0030



Metal End Cap. Recessed No Trim / Surface / Suspension Down. 35 mm (Colour Black)

