





## In-Finity 35 Suspension Down 4000K General Lighting

■ N35D194G30B - White

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit not included.


### Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 2491                |
| Lamp category   | LED   | Mountings      | Suspension          |
| Power (W)       | 41W   | Environment    | Indoor dry location |
| CCT (K)         | 4000K |                |                     |
| CRI             | 80    |                |                     |

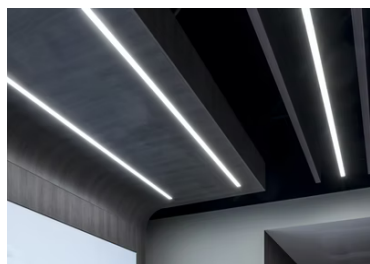

### Optical

|                        |                |
|------------------------|----------------|
| Lighting type          | Direct         |
| LED type               | Top LED        |
| Light distribution     | Symmetric      |
| Optical type           | Diffused light |
| Beam angle (°)         | 110            |
| Beam angle C90-270 (°) | 110            |



Beam Angle: 107°

| h(m) | E(lx) | D(m)  |
|------|-------|-------|
| 1    | 916   | 2.63  |
| 2    | 229   | 5.26  |
| 3    | 102   | 7.90  |
| 4    | 57    | 10.53 |
| 5    | 37    | 13.16 |

Luminous flux luminaire  
2491 lm

### Electrical

|                |              |                  |         |
|----------------|--------------|------------------|---------|
| Frequency (Hz) | 50/60        | Emergency        | Without |
| Voltage (V)    | 220.00       | Insulation class | I       |
| Dimmable       | No           |                  |         |
| Driver         | Integrated   |                  |         |
| Driver type    | Non Dimmable |                  |         |

### Physical

|             |       |
|-------------|-------|
| Color       | White |
| Orientation | Fixed |
| Weight (kg) | 4.48  |
| Length (mm) | 1970  |

### Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 35 Suspension Down 4000K General Lighting



Suspension kit  
08.0030



Metal End Cap. Recessed No Trim /  
Surface / Suspension Down. 35 mm  
(Colour White)  
08.9050.40



500 mm opal diffuser. Diffuse, glare  
free and uniform lighting throughout  
the room  
08.0109.00



Power supply rose  
08.0031.00



Metal End Cap. Recessed No Trim /  
Surface / Suspension Down. 35 mm  
(Colour Anodized Grey)  
08.9050.02



Metal End Cap. Recessed No Trim /  
Surface / Suspension Down. 35 mm  
(Colour Black)  
08.9050.NS



Metal cover. Surface / Suspension  
Down. 35 mm  
08.9050.06