

K 03	F	IP 20	CE	RETILAP	GWT 850°	
DIFFUSED LIGHT	<u> </u>					

In-Finity 35 Suspension Up & Down 3000K General Lighting Dali

N35U113G30BDA - White

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.

N 4 ·	specifications
N/Inim	conciticatione

Main specifications			
Number of heads	1	Net lumen (lm)	2130
Lamp category	LED	Mountings	Suspension
Power (W)	36.5W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

Optical

Electrical Frequency (Hz)

Voltage (V)

Dimmable


Driver

Lighting type LED type Light distribution Optical type Beam angle (°) Beam angle C90-270 (°) Indirect, Direct Top LED Symmetric Diffused light 110 110

50/60

220.00

Yes Integrated



Beam Angle DIR: 107°				
h(m)	E(İ x)	D(m)		
1	483	2.63		
2	121	5.26		
3	54	7.90		
4	30	10.53		
5	19	13.16		

Luminous flux luminaire 2130 lm

Insulation class

Emergency

Without


1			

Driver type	Dimmable DALI 1	
Physical		
Color	White	
Orientation	Fixed	
Weight (kg)	2.56	
Length (mm)	1125	

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 35 Suspension Up & Down 3000K General Lighting Dali

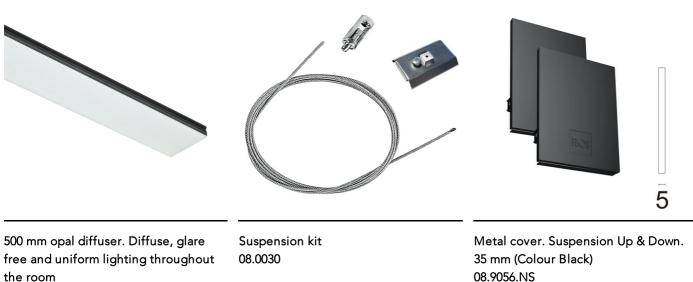

08.0109.00

08.9056.NS



Metal cover. Suspension Up & Down. 35 mm (Colour Anodized Grey) 08.9056.02



Metal cover. Suspension Up & Down. 35 mm (Colour White) 08.9056.40



Power supply rose. Dali 08.0031.00.DA



Metal cover. Suspension Up & Down. 35 mm 08.9056.06