





## In-Finity 35 Suspension Up & Down 3000K General Lighting

### ■ N35U163G14B - Black

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.


### Main specifications

Number of heads	1	Net lumen (lm)	3195
Lamp category	LED	Mountings	Suspension
Power (W)	57W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		

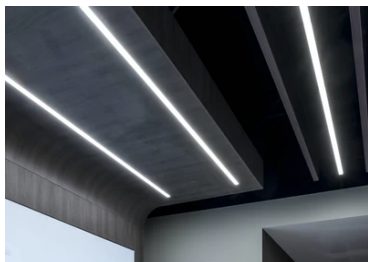

### Optical

Lighting type	Indirect, Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	110
Beam angle C90-270 (°)	110



Beam Angle DIR: 107°

h(m)	E(lx)	D(m)
1	725	2.63
2	181	5.26
3	81	7.90
4	45	10.53
5	29	13.16

Luminous flux luminaire  
3195 lm

### Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	I
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		

### Physical

Color	Black
Orientation	Fixed
Weight (kg)	3.84
Length (mm)	1690

### Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



## In-Finity 35 Suspension Up & Down 3000K General Lighting



Suspension kit  
08.0030



Metal cover. Suspension Up & Down.  
35 mm  
08.9056.06



Metal cover. Suspension Up & Down.  
35 mm (Colour Black)  
08.9056.NS



Power supply rose  
08.0031.00



Metal cover. Suspension Up & Down.  
35 mm (Colour Anodized Grey)  
08.9056.02



Metal cover. Suspension Up & Down.  
35 mm (Colour White)  
08.9056.40



500 mm opal diffuser. Diffuse, glare  
free and uniform lighting throughout  
the room  
08.0109.00