





In-Finity 35 Suspension Up & Down 4000K General Lighting

■ N35U194G14B - Black

LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.


Main specifications

| | | | |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 4036 |
| Lamp category | LED | Mountings | Suspension |
| Power (W) | 66W | Environment | Indoor dry location |
| CCT (K) | 4000K | | |
| CRI | 80 | | |

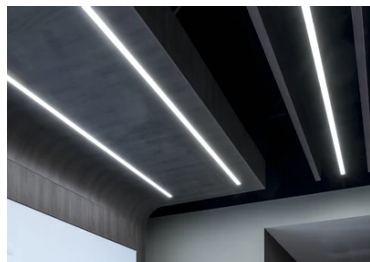

Optical

| | |
|------------------------|------------------|
| Lighting type | Indirect, Direct |
| LED type | Top LED |
| Light distribution | Symmetric |
| Optical type | Diffused light |
| Beam angle (°) | 110 |
| Beam angle C90-270 (°) | 110 |

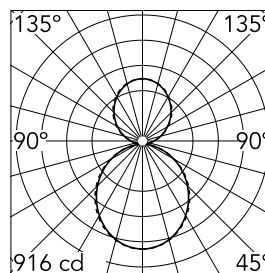

Beam Angle DIR: 107°

h(m) E(lx) D(m)

1 916 2.63

2 229 5.26

3 102 7.90

4 57 10.53

5 37 13.16

Luminous flux luminaire
4036 lm

Electrical

| | | | |
|----------------|--------------|------------------|---------|
| Frequency (Hz) | 50/60 | Emergency | Without |
| Voltage (V) | 220.00 | Insulation class | I |
| Dimmable | No | | |
| Driver | Integrated | | |
| Driver type | Non Dimmable | | |

Physical

| | |
|-------------|-------|
| Color | Black |
| Orientation | Fixed |
| Weight (kg) | 4.48 |
| Length (mm) | 1970 |

Note

Opal Diffuser: Diffuse, glare free and uniform lighting throughout the room. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 35 Suspension Up & Down 4000K General Lighting



5

Metal cover. Suspension Up & Down.
35 mm (Colour Anodized Grey)
08.9056.02



5

Metal cover. Suspension Up & Down.
35 mm (Colour White)
08.9056.40



5

Metal cover. Suspension Up & Down.
35 mm
08.9056.06



5

Metal cover. Suspension Up & Down.
35 mm (Colour Black)
08.9056.NS



Power supply rose
08.0031.00



Suspension kit
08.0030



500 mm opal diffuser. Diffuse, glare
free and uniform lighting throughout
the room
08.0109.00