



In-Finity 70 Recessed Trim Dihedral Corner 3000K Micro-Prismatic Diffuser Dali

■ N70TDC3U30BDA - White


LED modular system for recessed Trim installation, including LED luminaires, aluminum installation profile and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Main specifications

Number of heads	1	Net lumen (lm)	1511
Lamp category	LED	Mountings	Recessed
Power (W)	23.1W/m	Environment	Indoor dry location
CCT (K)	3000K		
CRI	80		



Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	67
Beam angle C90-270 (°)	76



Luminous flux luminaire
1511 lm

Beam Angle:	67°	
<u>h(m)</u>	<u>E(lx)</u>	<u>D(m)</u>
1	980	1.33
2	245	2.66
3	109	3.99
4	61	5.32
5	39	6.65

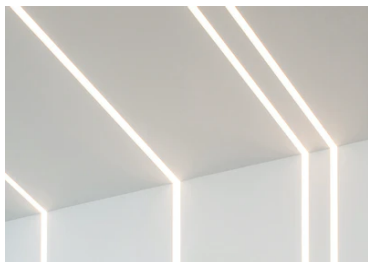

Electrical


Frequency (Hz)	50/60	Insulation class	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Dimmable DALI		
Emergency	Without		

Physical

Color	White
Orientation	Fixed
Recessed depth (mm)	135
Weight (kg)	4.10

Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 70 Recessed Trim Dihedral Corner 3000K Micro-Prismatic Diffuser Dali



5

Metal cover. Recessed Trim. 70 mm
(Colour White)
08.9053.40



500 mm micro-prismatic diffuser.
Highly efficient multilayer diffuser
that, thanks to its unique
microprismatic texture, provides a
glare free UGR<19 light beam
08.0113.00



5

Metal cover. Recessed Trim. 70 mm
(Colour Anodized Grey)
08.9053.02



5

Metal cover. Recessed Trim. 70 mm
(Colour Black)
08.9053.NS