

In-Finity 70 Surface 4000K General Lighting Dali

N70S054G14BDA - Black

LED modular system for surface installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules.

Main s	oecifications
--------	---------------


amp category	LED
Power (W)	23.1W/m
CCT (K)	4000K
CRI	80
Net lumen (lm)	1367

Mountings Environment Surface

Indoor dry location

Optical

Lighting type	Direct
LED type	Top LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	102
Beam angle C90-270 (°)	106



Luminous flux luminaire 1367 lm

Insulation class

Beam Angle:		102°
h(m)	E(l ×)	D(m
1	518	2.45
2	130	4.90
3	58	7.34
4	32	9.79
5	21	12.24

Electrical

Frequency (Hz)	50/60
Dimmable	Yes
Driver	Integrated
Driver type	Dimmable DALI
= =	1

Without **Emergency**


Physical

Color	Black
Orientation	Fixed
Weight (kg)	3.60
Length (mm)	565

Note

 $Opal\ Diffuser: Diffuse,\ glare\ free\ and\ uniform\ lighting\ throughout\ the\ room.\ /\ Emergency:\ Emergency\ Module$ available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Flnity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.

In-Finity 70 Surface 4000K General Lighting Dali

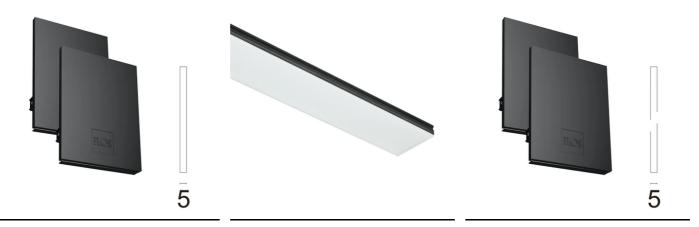

Metal End Cap. Recessed No Trim / Surface / Suspension Down. 70 mm (Colour Black) 08.9052.NS

500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room 08.0110.00

Metal cover. Surface / Suspension Down. 70 mm 08.9052.06



Metal End Cap. Recessed No Trim / Surface / Suspension Down. 70 mm (Colour Anodized Grey) 08.9052.02



Metal End Cap. Recessed No Trim / Surface / Suspension Down. 70 mm (Colour White) 08.9052.40