



In-Finity 70 Suspension Up & Down 4000K Micro-Prismatic Diffuser

■ N70U114U14B - Black


LED modular system for suspended installation, including LED luminaires, aluminum installation profile, and diffusers. Drivers included in lighting modules for 220-240V connection to mains or to other lighting modules. Suspension kit included.

Main specifications

| | | | |
|-----------------|---------|----------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 3039 |
| Lamp category | LED | Mountings | Suspension |
| Power (W) | 35.9W/m | Environment | Indoor dry location |
| CCT (K) | 4000K | | |
| CRI | 80 | | |

Optical



| | |
|------------------------|------------------|
| Lighting type | Indirect, Direct |
| LED type | Top LED |
| Light distribution | Symmetric |
| Optical type | Diffused light |
| Beam angle (°) | 67 |
| Beam angle C90-270 (°) | 76 |

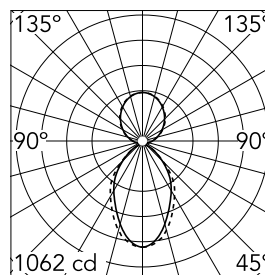

Beam Angle DIR: 67°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 1062 | 1.33 |
| 2 | 265 | 2.66 |
| 3 | 118 | 3.99 |
| 4 | 66 | 5.32 |
| 5 | 42 | 6.65 |

Luminous flux luminaire
3039 lm

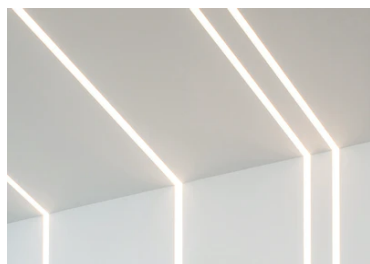

Electrical

| | | | |
|----------------|--------------|------------------|---|
| Frequency (Hz) | 50/60 | Insulation class | I |
| Dimmable | No | | |
| Driver | Integrated | | |
| Driver type | Non Dimmable | | |
| Emergency | Without | | |

Physical

| | |
|-------------|-------|
| Color | Black |
| Orientation | Fixed |
| Weight (kg) | 5 |
| Length (mm) | 1125 |

Note

Micro-Prismatic Diffuser: Highly efficient multilayer diffuser that, thanks to its unique micro-prismatic texture, provides a glare free UGR<19 light beam. / Emergency: Emergency Module available in all versions, length 1405 mm. In normal use, it uses the same power consumption as the standard In-Finity. In emergency use, it emits 10% of normal use during 3 hours. Endcaps: must be ordered separately. Consult Flos Architectural team for a configuration without end caps.



In-Finity 70 Suspension Up & Down 4000K Micro-Prismatic Diffuser



5

Metal cover. Suspension Up & Down.
70 mm (Colour Anodized Grey)
08.9057.02



5

Metal cover. Suspension Up & Down.
70 mm (Colour White)
08.9057.40



500 mm opal diffuser. Diffuse, glare free and uniform lighting throughout the room
08.0110.00



Power supply rose
08.0031.00



Suspension kit
08.0030



5

Metal cover. Suspension Up & Down.
70 mm
08.9057.06



5

Metal cover. Suspension Up & Down.
70 mm (Colour Black)
08.9057.NS