



## Johnny 120 Light Source

■ 03.0742.14 - Black

Recessed luminaire with LED light source. Power supply not included. One driver is needed per each light source.

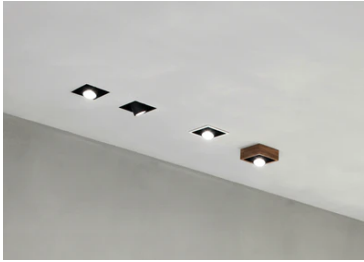


### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	1285
<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling recessed
<b>Power (W)</b>	18W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	LED array
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Medium
<b>Beam angle (°)</b>	22
<b>Beam angle C90-270 (°)</b>	22

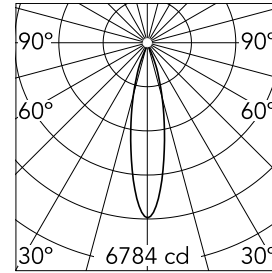

<b>Beam Angle:</b>	22°		
<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>	
1	6784	0.39	
2	1696	0.79	
3	754	1.18	
4	424	1.58	
5	271	1.97	

Luminous flux luminaire  
1285 lm (EXTREME CUT OFF)

### Electrical

<b>Frequency (Hz)</b>	50/60	<b>Emergency</b>	Without
<b>Voltage (V)</b>	36.00	<b>Insulation class</b>	III
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote excluded		
<b>Driver type</b>	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		

### Physical

<b>Color</b>	Black
<b>Orientation</b>	Adjustable
<b>Recessed depth (mm)</b>	160
<b>Weight (kg)</b>	0.56
<b>Tilt (°)</b>	40

### Note

Unique reference for Trim or No Trim recessed installation. 08.0555.00=includes white frame to complete Trim finishing. 08.0505.00=includes optional white and black frames to complete Trim finishing.

## Johnny 120 Light Source



---

Elliptical lens  
08.8431.00



---

Snoot shielding cone  
08.0526.40



---

Continuous current power supply.  
230/240V – 50/60Hz. Adjustable Current  
350mA – 17W / 500mA – 24W / 700/ 750  
mA – 32W switch by trailing and  
leading edge dimming, mains dimming  
or push dimming  
60.8534



---

Snoot shielding cone  
08.0526.00



---

Continuous current power supply of  
13-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
300 mA – 15W / 350 mA – 18W /  
400/450/500/550/600/  
650/700/750/800/850/900 mA – 15W.  
switch. 0/1-10V or push dimming  
60.9188



---

Snoot shielding cone  
08.0526.BW



---

Continuous current power supply of  
10-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
250 mA – 10W / 350 mA – 15W / 400 mA  
– 17W / 450 mA – 19W / 500/550/600/700  
mA – 20W, Dali 1 switch.  
60.8847

Flood lens  
08.8432.00

---

Continuous current power supply  
220/240V – 50/60Hz. Adjustable Current  
300mA-13W / 350mA-15W / 400mA-18W  
/ 450mA-20W / 500mA-22W / 550mA-  
24W / 600mA-27W / 650mA-29W /  
700mA-31W / 750mA-32W / 800mA-33W  
/ 850mA-35W / 900mA-38W / 950mA-  
40W / 1000/1050mA-42W  
60.9162



---

Honeycomb  
08.8428.00

Continuous current power supply of  
18W, 220/240V – 50/60Hz with 450 mA  
supply voltage Mains dimming, trailing  
edge  
60.9268