

Johnny 120 Round 1L – Recessed Universal Frame

■ 08.0505.00 - Black

Recessed luminaire with LED light source. Power supply not included. One driver is needed per each light source.

Main specifications

Mountings	Ceiling recessed
Environment	Indoor dry location

Electrical




Emergency	Without
Insulation class	III

Physical

Color	Black
Weight (kg)	0.17

Note

Unique reference for Trim or No Trim recessed installation. 08.0555.00=includes white frame to complete Trim finishing. 08.0505.00=includes optional white and black frames to complete Trim finishing.

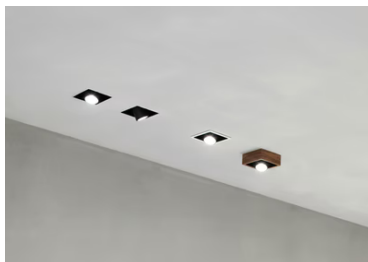

Johnny 120 Round 1L – Recessed Universal Frame



Snoot shielding cone
08.0526.00



Continuous current power supply of
13-20W, 110/240V – 50/60Hz with power
current selected through adjustable
300 mA – 15W / 350 mA – 18W /
400/450/500/550/600/
650/700/750/800/850/900 mA – 15W.
switch. 0/1-10V or push dimming
60.9188



Flood lens
08.8432.00



Continuous current power supply of
10-20W, 110/240V – 50/60Hz with power
current selected through adjustable
250 mA – 10W / 350 mA – 15W / 400 mA
– 17W / 450 mA – 19W / 500/550/600/700
mA – 20W, Dali 1 switch.
60.8847



Continuous current power supply
220/240V – 50/60Hz. Adjustable Current
300mA-13W / 350mA-15W / 400mA-18W
/ 450mA-20W / 500mA-22W / 550mA-
24W / 600mA-27W / 650mA-29W /
700mA-31W / 750mA-32W / 800mA-33W
/ 850mA-35W / 900mA-38W / 950mA-
40W / 1000/1050mA-42W
60.9162




Snoot shielding cone
08.0526.40



Honeycomb
08.8428.00




Continuous current power supply of
18W, 220/240V – 50/60Hz with 450 mA
supply voltage Mains dimming, trailing
edge
60.9268



Snoot shielding cone
08.0526.BW



Continuous current power supply.
230/240V – 50/60Hz. Adjustable Current
350mA – 17W / 500mA – 24W / 700/ 750
mA – 32W switch by trailing and
leading edge dimming, mains dimming
or push dimming
60.8534



Elliptical lens
08.8431.00



Continuous current power supply of
30-50W, 110/240V – 50/60Hz with power
current selected through adjustable
300mA – 34W /350 mA -39W /400 mA –
45W /450 – mA – 50W /500 mA – 56W
/550/600/650/700mA – 60W switch.Dali1,
Dali 2, 0/1-10V or push dimming
60.8837