
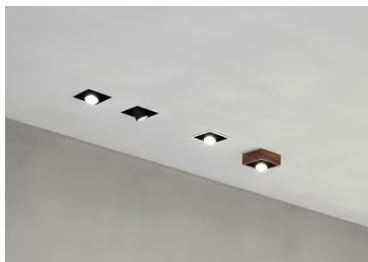


Johnny 120 Semi-Recessed 2L Square – Housing

■ 08.0507.14 - Black

Recessed luminaire with LED light source. Power supply not included. One driver is needed per each light source.



Main specifications



Mountings	Ceiling recessed
Environment	Indoor dry location

Electrical

Emergency	Without
Insulation class	III

Physical

Color	Black
Weight (kg)	0.30



Johnny 120 Semi-Recessed 2L Square – Housing



Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming 60.9188

Elliptical lens 08.8431.00

Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W /400 mA – 17W /450 mA – 19W /500/550/600/700 mA – 20W, Dali 1 switch. 60.8847



Snoot shielding cone 08.0526.00

Continuous current power supply. 230/240V – 50/60Hz. Adjustable Current 350mA – 17W / 500mA – 24W / 700/ 750 mA – 32W switch by trailing and leading edge dimming, mains dimming or push dimming 60.8534


Flood lens 08.8432.00



Continuous current power supply of
18W, 220/240V – 50/60Hz with 450 mA
supply voltage Mains dimming, trailing
edge
60.9268

Continuous current power supply
220/240V – 50/60Hz. Adjustable Current
300mA-13W / 350mA-15W / 400mA-18W
/ 450mA-20W / 500mA-22W / 550mA-
24W / 600mA-27W / 650mA-29W /
700mA-31W / 750mA-32W / 800mA-33W
/ 850mA-35W / 900mA-38W / 950mA-
40W / 1000/1050mA-42W
60.9162

Snoot shielding cone
08.0526.40



Honeycomb
08.8428.00

Snoot shielding cone
08.0526.BW