




## Johnny Ø 80 No Trim 1L Round

■ 03.0708.14.NT - Black

Recessed luminaire with LED light source. Power supply not included.

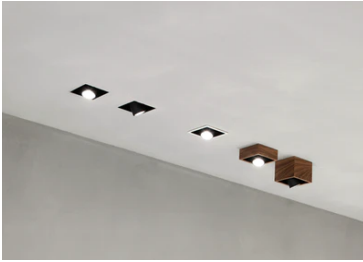


## Main specifications

|                 |       |                |                  |
|-----------------|-------|----------------|------------------|
| Number of heads | 1     | Net lumen (lm) | 311              |
| Lamp category   | LED   | Mountings      | Ceiling recessed |
| Power (W)       | 6.2W  | Environment    | Indoor           |
| CCT (K)         | 3000K |                |                  |
| CRI             | 90    |                |                  |

## Optical

|                        |                 |
|------------------------|-----------------|
| Lighting type          | Direct          |
| LED type               | Power LED       |
| Light distribution     | Symmetric Flood |
| Optical type           |                 |
| Beam angle (°)         | 31              |
| Beam angle C90-270 (°) | 31              |



Beam Angle: 31°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 998   | 0.55 |
| 2    | 249   | 1.10 |
| 3    | 111   | 1.65 |
| 4    | 62    | 2.20 |
| 5    | 40    | 2.75 |

Luminous flux luminaire  
311 lm (EXTREME CUT OFF)

## Electrical

|                |                                                                                            |                  |         |
|----------------|--------------------------------------------------------------------------------------------|------------------|---------|
| Frequency (Hz) | 50/60                                                                                      | Emergency        | Without |
| Voltage (V)    | 12.00                                                                                      | Insulation class | III     |
| Dimmable       | Yes                                                                                        |                  |         |
| Driver         | Remote                                                                                     |                  |         |
| Driver type    | Electronic,<br>Electronic dimmable,<br>Electronic dimmable 1-10V, Electronic dimmable DALI |                  |         |

## Physical

|                     |            |
|---------------------|------------|
| Color               | Black      |
| Orientation         | Adjustable |
| Recessed depth (mm) | 102        |
| Weight (kg)         | 0.24       |
| Tilt (°)            | 20         |

## Note

Accessories included (honeycomb and screening crosspiece).

## Johnny Ø 80 No Trim 1L Round



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W  
60.9160

Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W  
60.9207

Continuous current power supply, 1-10V, regulable Mains, leading & trailing edge 220/240V – 50/60Hz, 500mA – 10W  
60.9411



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.  
60.8847

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming  
60.9188

Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2  
60.9222



---

Installation frame No Trim  
08.9102.00