



Johnny ø80 No Trim 1L Round

■ 03.0700.14.NT - Black

Recessed luminaire with LED light source. Power supply not included.

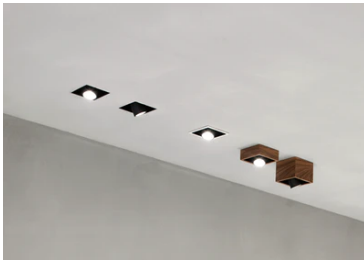


Main specifications

Number of heads	1	Net lumen (lm)	399
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	6.2W	Environment	Indoor
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	11
Beam angle C90-270 (°)	11




Beam Angle:	11°		
	h(m)	E(lx)	D(m)
	1	7629	0.19
	2	1907	0.38
	3	848	0.57
	4	477	0.76
	5	305	0.95

Luminous flux luminaire
399 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	12.00	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI		

Certification / Marking



Physical

Color	Black
Orientation	Adjustable
Recessed depth (mm)	102
Weight (kg)	0.24
Tilt (°)	20

Note

Accessories included (honeycomb and screening crosspiece).

Johnny ø80 No Trim 1L Round



Installation frame No Trim
08.9102.00



Continuous current power supply of
13-20W, 110*/240V – 50/60Hz with
power current selected through
adjustable switch. Synchronisation
cables not included.
60.9188



Constant Current Power Supply for
LED. Dimmable DALI. 10-20W
60.8847



Continuous current power supply of
12-20W, 110*/240V – 50/60Hz with
power current selected through
adjustable. Regulable DALI 1 y DALI 2
60.9222



Continuous current power supply,
Mains dimming , 220/240V – 50/60Hz,
10W – 500mA.
60.9411



Continuous current power supply,
dimmable Casambi, 220/240V –
50/60Hz, 35W – 650mA / 36W – 700 mA.
60.9207



with power current selected through
adjustable with switch 200mA – 8,5W /
250mA – 11W / 300mA – 13W / 350mA –
15W / 400mA – 17,5W / 450mA 19,5W /
500mA – 22W.
60.9160