
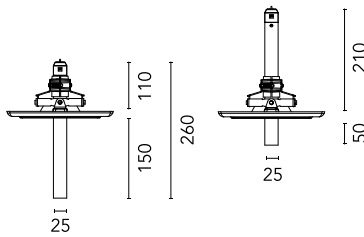


## Junco 250 mm

■ 08.8590.AAA - Black

Luminaire that offers many possibilities. Can be individually focused and their recessed height is adjustable.

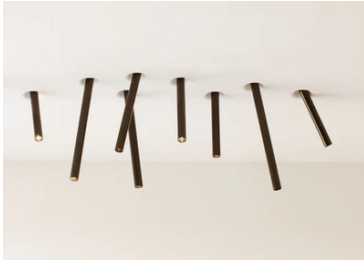

### Main specifications

<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling recessed
<b>Power (W)</b>	2.2W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	80		
<b>Net lumen (lm)</b>	173		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Accent light
<b>Beam angle (°)</b>	15

### Electrical

<b>Voltage (V)</b>	3.00
<b>Dimmable</b>	No
<b>Driver</b>	Remote excluded
<b>Driver type</b>	Non Dimmable, Dimmable Push, Dimmable 1-10V
<b>Emergency</b>	Without

### Physical

<b>Color</b>	Black	<b>Rotation (°)</b>	360
<b>Orientation</b>	Adjustable	<b>Length (mm)</b>	250
<b>Recessed depth (mm)</b>	210		
<b>Weight (kg)</b>	0.13		
<b>Tilt (°)</b>	20		

### Note

Soft Plate to be order separately.

## Junco 250 mm



---

Not dimmable continuous current  
power supply of 17W, 700 mA –  
100/240V – 50/60Hz  
60.8655

---

Continuous current power supply of  
17/24/32W, 220/240V – 50/60Hz with  
power current selected through  
adjustable 350 mA -17W / 500 mA –  
24W / 700 mA – 32W switch  
60.8656

---

Continuous current power supply of  
25W, 110/240V – 50/60Hz with power  
current selected through adjustable  
350 mA-18W / 400 mA – 21W / 500mA –  
25W /600mA – 30W /700/750/900 mA –  
32W switch. 1-10V or push dimming,  
synchronisation cables not included.  
60.8533