Kap 80 Surface Round Optic Flood Dali/Push Version

03.6045.14.DA - Black/Gold

Luminaire for mounting on the ceiling with LED light source. Power source incorporated into luminaire body. Dali/Push dimming 220/240V.

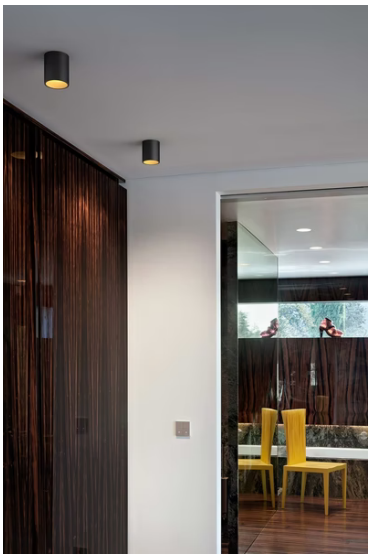



Main specifications

Number of heads	1	**Net lumen (lm)**	687
Lamp category	LED	**Mountings**	Ceiling surface
Power (W)	9.2W	**Environment**	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	45
Beam angle C90-270 (°)	45



Luminous flux luminaire
687 lm (EXTREME CUT OFF)

Beam Angle: 45°

h(m)	E(lx)	D(m)
1	1255	0.83
2	314	1.66
3	139	2.48
4	78	3.31
5	50	4.14

Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	18.20	**Insulation class**	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Dimmable Push, Dimmable DALI 1		

Physical

Color	Black/Gold
Orientation	Fixed
Weight (kg)	0.45

IP 20 RETILAP GWT 850°