Kap 80 Surface Round Optic Spot Dali/Push Version

03.6023.18.DA - Deep Brown/Black

Luminaire for mounting on the ceiling with LED light source. Power source incorporated into luminaire body. Dali/Push dimming 220/240V.

Main specifications

Number of heads	1	**Net lumen (lm)**	628
Lamp category	LED	**Mountings**	Ceiling surface
Power (W)	9.2W	**Environment**	Indoor dry location
CCT (K)	2700K		
CRI	90		

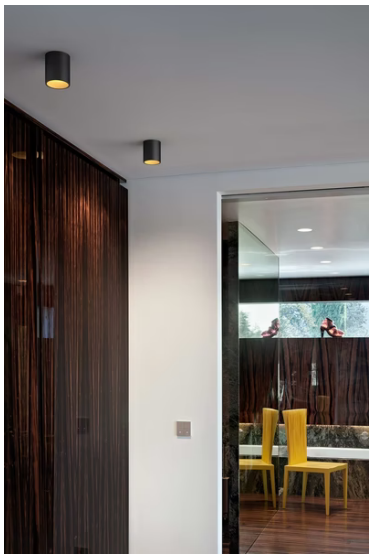

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	19
Beam angle C90-270 (°)	19



Luminous flux luminaire
628 lm (EXTREME CUT OFF)

Beam Angle: 19°

h(m)	E(lx)	D(m)
1	2690	0.33
2	673	0.66
3	299	0.99
4	168	1.31
5	108	1.64



Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	18.20	**Insulation class**	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Dimmable Push, Dimmable DALI 1		

Physical

Color	Deep Brown/Black
Orientation	Fixed
Weight (kg)	0.45