Kap 80 Surface Round Optic Spot Dali/Push Version

03.6025.14.DA - Black/Gold

Luminaire for mounting on the ceiling with LED light source. Power source incorporated into luminaire body. Dali/Push dimming 220/240V.

Main specifications

Number of heads	1	**Net lumen (lm)**	712
Lamp category	LED	**Mountings**	Ceiling surface
Power (W)	9.2W	**Environment**	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

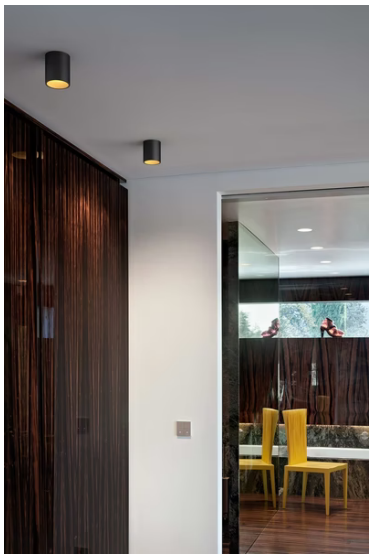

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	19
Beam angle C90-270 (°)	19



Luminous flux luminaire
712 lm (EXTREME CUT OFF)

Beam Angle: 19°

h(m)	E(lx)	D(m)
1	2995	0.33
2	749	0.67
3	333	1.00
4	187	1.33
5	120	1.66

Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	18.20	**Insulation class**	I
Dimmable	Yes		
Driver	Integrated		
Driver type	Dimmable Push, Dimmable DALI 1		



Physical

Color	Black/Gold
Orientation	Fixed
Weight (kg)	0.45