

Kap Ø 105 Adjustable Optic Flood

■ 05.7117.BU - Blue


Recessed luminaire with LED light source. Remote transformer not included. Pre-installation frame. To be ordered separately. Diffusing lens included.

Main specifications

| | | | |
|------------------|-------|----------------|------------------|
| Number of heads | 1 | CRI | 90 |
| Lamp category | LED | Net lumen (lm) | 2326 |
| Power (W) | 25.9W | Mountings | Ceiling recessed |
| System power (W) | 25.9 | Environment | Indoor |
| CCT (K) | 3000K | | |

Optical

| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Flood |
| Beam angle (°) | 53 |
| Beam angle C90-270 (°) | 53 |
| Efficiency (lm/W) | 89 |

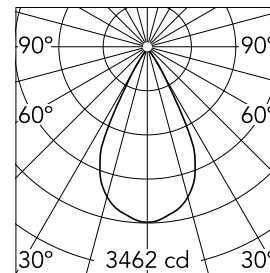

| | | |
|-------------|------|------------|
| Beam Angle: | 53° | |
| | h(m) | E(lx) D(m) |
| | 1 | 3462 1.01 |
| | 2 | 866 2.01 |
| | 3 | 385 3.02 |
| | 4 | 216 4.03 |
| | 5 | 138 5.04 |

Luminous flux luminaire
2326 lm (EXTREME CUT OFF)


Electrical

| | | | |
|--------------|---|------------------|---------|
| Voltage (V) | 34 | Emergency | Without |
| Current (mA) | 650 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote | | |
| Driver type | Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI | | |

Physical

| | | | |
|---------------------|------------|--------------------|-----|
| Color | Blue | Rotation (°) | 360 |
| Orientation | Adjustable | Spot diameter (mm) | 105 |
| Recessed depth (mm) | 144 | | |
| Weight (kg) | 0,7 | | |
| Tilt (°) | 20 | | |

Kap Ø 105 Adjustable Optic Flood

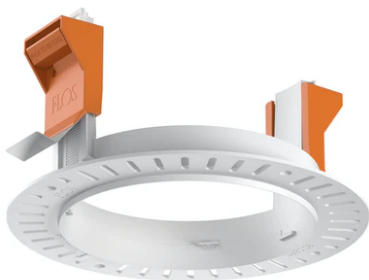

Installation frame No Trim
08.0132.00

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable
60.9592

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming
60.9188



Continuous current power supply of 10-20W, 110/240V – 50/60Hz with power current selected through adjustable 250 mA – 10W / 350 mA – 15W / 400 mA – 17W / 450 mA – 19W / 500/550/600/700 mA – 20W, Dali 1 switch.
60.8847

Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207