

Kap Ø 105 Adjustable Optic Spot

■ 05.7115.74 - Black


Recessed luminaire with LED light source. Remote transformer not included. Pre-installation frame. To be ordered separately. Diffusing lens included.

Main specifications

| | | | |
|------------------|-------|----------------|---------------------|
| Number of heads | 1 | CRI | 90 |
| Lamp category | LED | Net lumen (lm) | 1930 |
| Power (W) | 22.8W | Mountings | Ceiling recessed |
| System power (W) | 25.9 | Environment | Indoor dry location |
| CCT (K) | 3000K | | |

Optical

| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Spot |
| Beam angle (°) | 16 |
| Beam angle C90-270 (°) | 16 |
| UGRL | 1 |
| Efficiency (lm/W) | 74 |

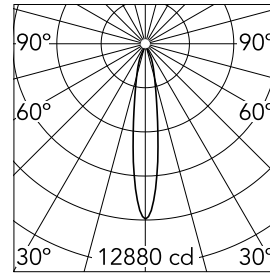

Beam Angle: 16°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 12880 | 0.29 |
| 2 | 3220 | 0.57 |
| 3 | 1431 | 0.86 |
| 4 | 805 | 1.15 |
| 5 | 515 | 1.43 |


Luminous flux luminaire
1930 lm (EXTREME CUT OFF)

Electrical

| | | | |
|--------------|---|------------------|---------|
| Voltage (V) | 34 | Emergency | Without |
| Current (mA) | 650 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote excluded | | |
| Driver type | Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V | | |

Physical

| | | | |
|---------------------|------------|--------------------|--------|
| Color | Black | Rotation (°) | 360 |
| Orientation | Adjustable | Spot diameter (mm) | 105 |
| Recessed depth (mm) | 144 | Lifespan (L70 B10) | L80B50 |
| Weight (kg) | 0.7 | | |
| Tilt (°) | 20 | | |




Kap Ø 105 Adjustable Optic Spot



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W
60.9439

Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W
700/750/800/900/950/1000/1050mA-38W
60.9186

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable
60.9592

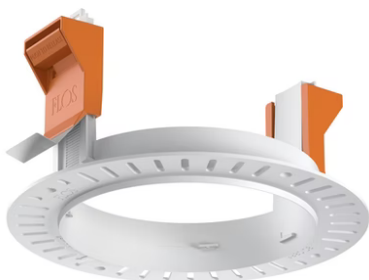

Installation frame No Trim
08.0132.00

Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207