

## Kap Ø 105 Deep

### 05.7150.CU - Copper

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Pre-installation frame. To be ordered separately.

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Pre-installation frame. To be ordered separately.

### Main specifications

|                  |       |                |                     |
|------------------|-------|----------------|---------------------|
| Number of heads  | 1     | CRI            | 90                  |
| Lamp category    | LED   | Net lumen (lm) | 1152                |
| Power (W)        | 22.8W | Mountings      | Ceiling recessed    |
| System power (W) | 22.8  | Environment    | Indoor dry location |
| CCT (K)          | 2700K |                |                     |

### Optical

|                    |           |                   |       |
|--------------------|-----------|-------------------|-------|
| Lighting type      | Direct    | Efficiency (lm/W) | 50.53 |
| LED type           | LED array |                   |       |
| Light distribution | Symmetric |                   |       |
| Optical type       | Spot      |                   |       |
| UGRL               | 18        |                   |       |


### Electrical

|              |                                                                 |                  |         |
|--------------|-----------------------------------------------------------------|------------------|---------|
| Voltage (V)  | 34                                                              | Emergency        | Without |
| Current (mA) | 650                                                             | Insulation class | III     |
| Dimmable     | Yes                                                             |                  |         |
| Driver       | Remote excluded                                                 |                  |         |
| Driver type  | Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V |                  |         |

### Physical

|                     |        |                    |        |
|---------------------|--------|--------------------|--------|
| Color               | Copper | Lifespan (L70 B10) | L80B50 |
| Orientation         | Fixed  |                    |        |
| Recessed depth (mm) | 190    |                    |        |
| Weight (kg)         | 0.48   |                    |        |
| Spot diameter (mm)  | 106    |                    |        |

## Kap Ø 105 Deep

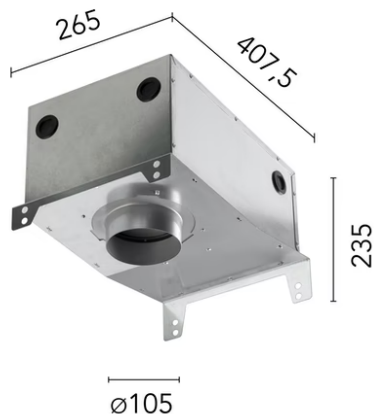

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable  
60.9592

Installation can for concrete  
08.8420.00

Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W  
60.9207



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W  
60.9439

Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W  
700/750/800/900/950/1000/1050mA-38W  
60.9186

Installation frame No Trim  
08.9104.00