

Kap Ø 105 Deep

■ 05.7157.BU - Blue

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Pre-installation frame. To be ordered separately.


Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Pre-installation frame. To be ordered separately.

Main specifications

| | | | |
|-------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | CRI | 90 |
| Lamp category | LED | Net lumen (lm) | 1461 |
| Power (W) | 23W | Mountings | Ceiling recessed |
| System power (W) | 25.9 | Environment | Indoor dry location |
| CCT (K) | 3000K | | |

Optical

| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Flood |
| Beam angle (°) | 39 |
| Beam angle C90-270 (°) | 39 |
| Efficiency (lm/W) | 30 |

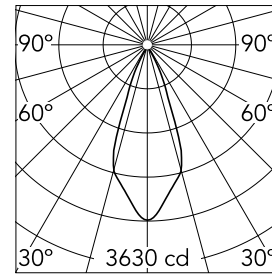

Beam Angle: 39°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 3630 | 0.71 |
| 2 | 907 | 1.42 |
| 3 | 403 | 2.13 |
| 4 | 227 | 2.84 |
| 5 | 145 | 3.55 |

Luminous flux luminaire
1461 lm (EXTREME CUT OFF)

Electrical

| | | | |
|---------------------|---|-------------------------|---------|
| Voltage (V) | 34 | Emergency | Without |
| Current (mA) | 650 | Insulation class | III |
| Dimmable | Yes | | |
| Driver | Remote excluded | | |
| Driver type | Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V | | |

Physical

| | |
|----------------------------|-------|
| Color | Blue |
| Orientation | Fixed |
| Recessed depth (mm) | 190 |
| Weight (kg) | 0,48 |
| Spot diameter (mm) | 106 |


Kap Ø 105 Deep



Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W
700/750/800/900/950/1000/1050mA-38W
60.9186

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W
60.9439

Non dimmable continuous current power supply. 15-30W, 220/240V –50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable
60.9592

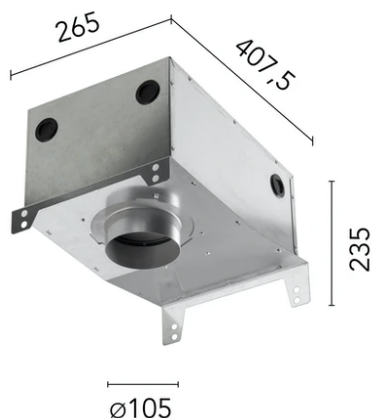

Installation can for concrete
08.8420.00

Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207

Installation frame No Trim
08.9104.00