

Kap Ø 105 Fixed

■ 05.7131.CU - Copper

Recessed luminaire with main voltage source.

Main specifications

Number of heads	1	Environment	Indoor dry location
Lamp category	LED		
Power (W)	MAX 3.9W		
System power (W)	4.2		
Mountings	Ceiling recessed		

Optical

Lighting type	Direct
Lamp type	PAR16
Light distribution	Symmetric

Electrical


Frequency (Hz)	50/60	Insulation class	II
Voltage (V)	230		
Current (mA)	-9		
Lamp holder	GZ10		
Emergency	Without		

Physical


Color	Copper
Orientation	Fixed
Recessed depth (mm)	155
Weight (kg)	0.23
Spot diameter (mm)	105

Note

Not suitable for lens accessories.



Kap Ø 105 Fixed

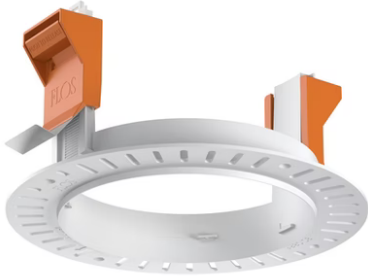

Installation frame No Trim
08.0132.00