


■ 05.7102.CU - Copper

Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	1945
Power (W)	22.8W	Mountings	Ceiling recessed
System power (W)	25.9	Environment	Indoor dry location
CCT (K)	2700K		

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	53
Beam angle C90-270 (°)	53
UGRL	15
Efficiency (lm/W)	75.1



Beam Angle:	51°		
<u>h(m)</u>	<u>E(lx)</u>	<u>D(m)</u>	
1	2755	0.96	
2	689	1.91	
3	306	2.87	
4	172	3.82	
5	110	4.78	

Luminous flux lumineire
1815 lm (EXTREME CUT OFF)

Voltage (V)	34
Current (mA)	650
Dimmable	Yes
Driver	Remote excluded
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V

Emergency Insulation class	Without III
-------------------------------	----------------

Color	Copper
Orientation	Fixed
Recessed depth (mm)	150
Weight (kg)	0.48
Spot diameter (mm)	105

Lifespan (L70 B10) L80B50


Kap Ø 105 Fixed Optic Flood



Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W
60.9439

Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W
700/750/800/900/950/1000/1050mA-38W
60.9186

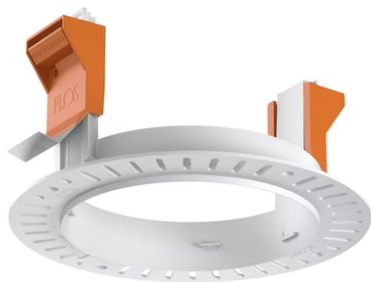

Installation frame No Trim
08.0132.00

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable
60.9592