

Kap Ø 105 Fixed Optic Medium

05.7106.B1 - White


Recessed luminaire with LED light source. Remote transformer not included. Pre-installation frame. To be ordered separately. Diffusing lens included.

Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	2222
Power (W)	22.8W	Mountings	Ceiling recessed
System power (W)	25.9	Environment	Indoor dry location
CCT (K)	3000K		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	27
Beam angle C90-270 (°)	27
UGRL	17
Efficiency (lm/W)	85



Beam Angle:	27°	
<u>h(m)</u>	<u>E(lx)</u>	<u>D(m)</u>
1	8281	0.48
2	2070	0.97
3	920	1.45
4	518	1.93
5	331	2.41

Luminous flux luminaire
2222 lm (EXTREME CUT OFF)


Electrical

Voltage (V)	34	Emergency	Without
Current (mA)	650	Insulation class	III
Dimmable	Yes		
Driver	Remote		
	excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable Casambi, Dimmable 1-10V		

Physical

Color	White	Lifespan (L70 B10) L80B50
Orientation	Fixed	
Recessed depth (mm)	150	
Weight (kg)	0.48	
Spot diameter (mm)	105	

Kap Ø 105 Fixed Optic Medium

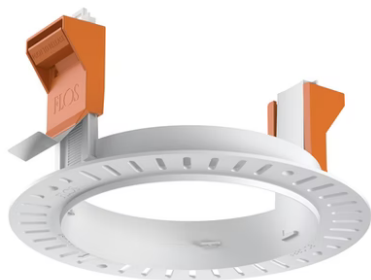

Installation frame No Trim
08.0132.00



Continuous current power supply,
dimmable Casambi 220/240V-50/60Hz,
300mA-16W / 350mA-18,5W / 400mA-
21,5W / 450mA-24W / 500mA-27W /
600mA-32W / 650mA-35W / 700mA-36W
/750/800/900/1000/1050mA – 38W
60.9207



Continuous current power supply, 0/1-
10V dimmable, 220/240V – 50/60Hz,
300mA-16W / 350mA-18W / 400mA-21W
/ 500mA-27W / 600mA-32W / 650mA-
35W /
700/750/800/900/950/1000/1050mA-36W
60.9439



Continuous current supply source 240V
– 50/60Hz with dimmable DALI 2, push
dimming. 300mA-16W / 350mA-18W /
400mA-21W / 500mA-27W / 600mA-32W
/ 650mA-35W
700/750/800/900/950/1000/1050mA-38W
60.9186



Non dimmable continuous current
power supply. 15-30W, 220/240V
-50/60Hz with power current selected
through adjustable switch. 350mA –
15W / 400mA – 17W / 450mA – 19W /
500mA – 22W / 550mA – 24W / 600mA –
26W / 650mA – 28W / 700mA – 30W no
regulable
60.9592