


05.7105.B1 - White

Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	2275
Power (W)	22.8W	Mountings	Ceiling recessed
System power (W)	25.9	Environment	Indoor dry location
CCT (K)	3000K		

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	17
Beam angle C90-270 (°)	17
UGRL	17
Efficiency (lm/W)	54



Beam Angle:	17°	
<u>h(m)</u>	<u>E(lx)</u>	<u>D(m)</u>
1	14445	0.30
2	3611	0.59
3	1605	0.89
4	903	1.18
5	578	1.48

Luminous flux lumineire
2275 lm (EXTREME CUT OFF)

Voltage (V)	34
Current (mA)	650
Dimmable	Yes
Driver	Remote
Driver type	excluded
	Non Dimmable,
	Dimmable DALI
	2, Dimmable
	Casambi,
	Dimmable 1-10V

Emergency Insulation class	Without III
-------------------------------	----------------

Color	White	Lifespan (L70 B10) L80B50
Orientation	Fixed	
Recessed depth (mm)	150	
Weight (kg)	0.48	
Spot diameter (mm)	105	


Kap Ø 105 Fixed Optic Spot



Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W
700/750/800/900/950/1000/1050mA-38W
60.9186

Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W
60.9207

Non dimmable continuous current power supply. 15-30W, 220/240V – 50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable
60.9592

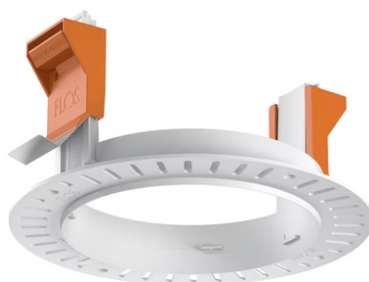

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W
60.9439

Installation frame No Trim
08.0132.00