


05.7105.GL - Gold

## Main specifications

|                  |       |                |                     |
|------------------|-------|----------------|---------------------|
| Number of heads  | 1     | CRI            | 90                  |
| Lamp category    | LED   | Net lumen (lm) | 2190                |
| Power (W)        | 22.8W | Mountings      | Ceiling recessed    |
| System power (W) | 25.9  | Environment    | Indoor dry location |
| CCT (K)          | 3000K |                |                     |

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | LED array |
| Light distribution     | Symmetric |
| Optical type           | Spot      |
| Beam angle (°)         | 17        |
| Beam angle C90-270 (°) | 17        |
| UGRL                   | 7         |
| Efficiency (lm/W)      | 84        |



Beam Angle: 17°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 14326 | 0.29 |
| 2    | 3581  | 0.59 |
| 3    | 1592  | 0.88 |
| 4    | 895   | 1.17 |
| 5    | 573   | 1.47 |

Luminous flux luminaire  
2190 lm (EXTREME CUT OFF)

|                     |                                                                             |
|---------------------|-----------------------------------------------------------------------------|
| <b>Voltage (V)</b>  | 34                                                                          |
| <b>Current (mA)</b> | 650                                                                         |
| <b>Dimmable</b>     | Yes                                                                         |
| <b>Driver</b>       | Remote<br>excluded                                                          |
| <b>Driver type</b>  | Non Dimmable,<br>Dimmable DALI<br>2, Dimmable<br>Casambi,<br>Dimmable 1-10V |

|                               |                |
|-------------------------------|----------------|
| Emergency<br>Insulation class | Without<br>III |
|-------------------------------|----------------|

|                     |       |                                  |
|---------------------|-------|----------------------------------|
| Color               | Gold  | <b>Lifespan (L70 B10)</b> L80B50 |
| Orientation         | Fixed |                                  |
| Recessed depth (mm) | 150   |                                  |
| Weight (kg)         | 0.48  |                                  |
| Spot diameter (mm)  | 105   |                                  |


## Kap Ø 105 Fixed Optic Spot



Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W  
60.9207

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W  
60.9439

Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W  
700/750/800/900/950/1000/1050mA-38W  
60.9186

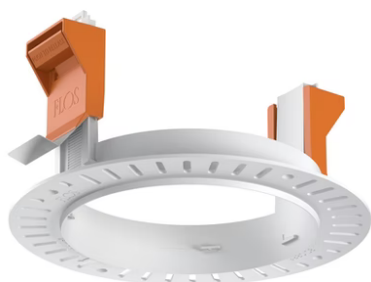

Installation frame No Trim  
08.0132.00

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable  
60.9592