

05.7121.74 - Black

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Pre-installation frame. To be ordered separately.


Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included.  
Pre-installation frame. To be ordered separately.

## Main specifications

|                  |       |                |                     |
|------------------|-------|----------------|---------------------|
| Number of heads  | 1     | CRI            | 90                  |
| Lamp category    | LED   | Net lumen (lm) | 1898                |
| Power (W)        | 22.8W | Mountings      | Ceiling recessed    |
| System power (W) | 25.9  | Environment    | Indoor dry location |
| CCT (K)          | 3000K |                |                     |

## Optical

|                               |             |
|-------------------------------|-------------|
| <b>Lighting type</b>          | Direct      |
| <b>LED type</b>               | LED array   |
| <b>Light distribution</b>     | Asymmetric  |
| <b>Optical type</b>           | Wall Washer |
|                               | Down        |
| <b>Beam angle (°)</b>         | 28          |
| <b>Beam angle C90-270 (°)</b> | 35          |
| <b>UGRL</b>                   | 19          |
| <b>Efficiency (lm/W)</b>      | 73          |



Luminous flux lumineuse  
1898 lm (EXTREME CUT OFF)

|             |              |             |  |
|-------------|--------------|-------------|--|
| Beam Angle: | 28°          |             |  |
| <u>h(m)</u> | <u>E(lx)</u> | <u>D(m)</u> |  |
| 1           | 4214         | 0.63        |  |
| 2           | 1054         | 1.26        |  |
| 3           | 468          | 1.89        |  |
| 4           | 263          | 2.52        |  |
| 5           | 169          | 3.16        |  |


## Electrical

|                     |                                                                             |                         |         |
|---------------------|-----------------------------------------------------------------------------|-------------------------|---------|
| <b>Voltage (V)</b>  | 34                                                                          | <b>Emergency</b>        | Without |
| <b>Current (mA)</b> | 650                                                                         | <b>Insulation class</b> | III     |
| <b>Dimmable</b>     | Yes                                                                         |                         |         |
| <b>Driver</b>       | Remote                                                                      |                         |         |
|                     | excluded                                                                    |                         |         |
| <b>Driver type</b>  | Non Dimmable,<br>Dimmable DALI<br>2, Dimmable<br>Casambi,<br>Dimmable 1-10V |                         |         |

## Physical

|                     |       |                                  |
|---------------------|-------|----------------------------------|
| Color               | Black | <b>Lifespan (L70 B10)</b> L80B50 |
| Orientation         | Fixed |                                  |
| Recessed depth (mm) | 134   |                                  |
| Weight (kg)         | 0.5   |                                  |
| Spot diameter (mm)  | 105   |                                  |

## Kap Ø 105 Wall-Washer

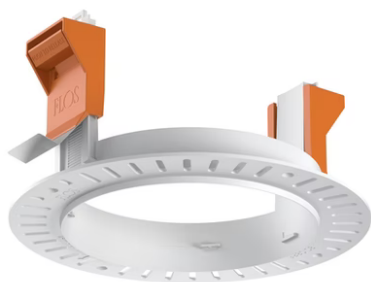

Installation frame No Trim  
08.0132.00

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable  
60.9592

Continuous current power supply, dimmable Casambi 220/240V-50/60Hz, 300mA-16W / 350mA-18,5W / 400mA-21,5W / 450mA-24W / 500mA-27W / 600mA-32W / 650mA-35W / 700mA-36W / 750/800/900/1000/1050mA – 38W  
60.9207



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W  
60.9439

Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W  
700/750/800/900/950/1000/1050mA-38W  
60.9186