


*NO TRIM
**TRIM



Kap Ø 145 1-10V

■ 03.4496.BUB1V - Blue


Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

Main specifications

Number of heads	1	CRI	98
Lamp category	LED	Net lumen (lm)	550
Power (W)	17W	Mountings	Ceiling recessed
System power (W)	17	Environment	Indoor dry location
CCT (K)	2700K		

Optical

Lighting type	Direct
LED type	Phosphor LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	54
Beam angle C90-270 (°)	54
UGRL	9
Efficiency (lm/W)	32



Beam Angle: 54°

h(m)	E(lx)	D(m)
1	766	1.02
2	191	2.04
3	85	3.06
4	48	4.08
5	31	5.11

Luminous flux luminaire
550 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Driver type	Dimmable 1-10V
Voltage (V)	22	Emergency	Without
Current (mA)	700	Insulation class	II
Dimmable	Yes		
Driver	Remote included		


Physical

Color	Blue
Orientation	Fixed
Weight (kg)	0.88
Spot diameter (mm)	145
Lifespan (L70 B10)	L80B50

Note

Pre-installation frame. To be ordered separately.


Kap Ø 145 1-10V



Installation Frame Trim
08.8491.GL

Installation Frame No Trim
08.8156.00

Installation Frame Trim
08.8491.14

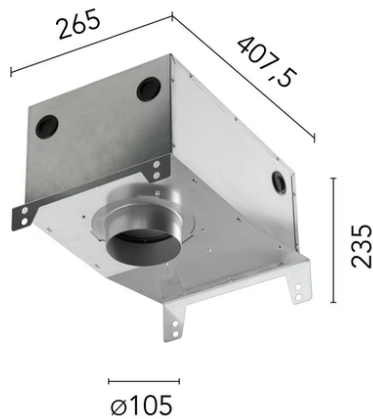

Installation Frame Trim
08.8491.BU

Installation can for concrete
08.8421.00

Installation Frame Trim
08.8491.30