




Kap Ø 145 Wall-Washer

■ 03.4589.BU - Blue

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

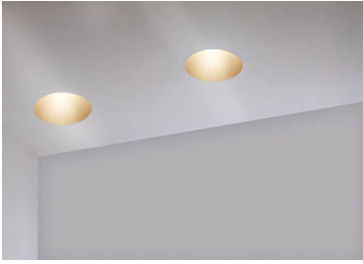

*NO TRIM
**TRIM




Main specifications

Number of heads	1	Net lumen (lm)	980
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	17W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Indirect, Direct
LED type	LED array
Light distribution	Asymmetric
Optical type	Wall Washer
	Down
Beam angle (°)	56
Beam angle C90-270 (°)	63
Efficiency (lm/W)	57

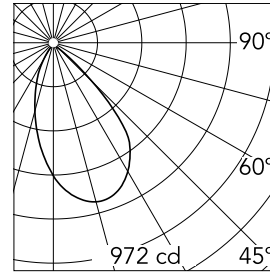

Beam Angle: 56°

h(m)	E(lx)	D(m)
1	972	1.17
2	243	2.34
3	108	3.51
4	61	4.68
5	39	5.85

Luminous flux luminaire
980 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	27.40	Insulation class	II
Dimmable	No		
Driver	Remote included		
Driver type	Non Dimmable		


Physical

Color	Blue
Orientation	Fixed
Weight (kg)	0.94
Spot diameter (mm)	145

Note

Pre-installation frame. To be ordered separately.

Kap Ø 145 Wall-Washer

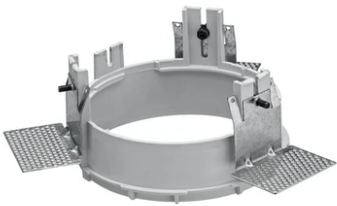

Installation Frame No Trim
08.8251.00



Installation Frame Trim
08.8491.14



Installation Frame Trim
08.8491.BU



Installation Frame Trim
08.8491.GL



Installation Frame Trim
08.8491.30