




Kap Ø 145 Wall-Washer 1-10V

■ 03.4475.BUC1V - Blue

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

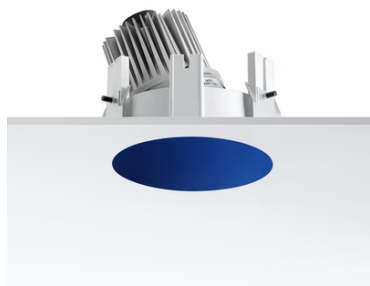

*NO TRIM
**TRIM




Main specifications

Number of heads	1	CRI	98
Lamp category	LED	Net lumen (lm)	736
Power (W)	17W	Mountings	Ceiling recessed
System power (W)	17	Environment	Indoor dry location
CCT (K)	3000K		

Optical

Lighting type	Indirect, Direct
LED type	Phosphor LED
Light distribution	Asymmetric
Optical type	Wall Washer
	Down
Beam angle (°)	58
Beam angle C90-270 (°)	65
UGRL	17
Efficiency (lm/W)	43



Beam Angle: 58°

h(m)	E(lx)	D(m)
1	680	1.25
2	170	2.51
3	76	3.76
4	43	5.01
5	27	6.26

Luminous flux luminaire
736 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Driver type	Dimmable 1-10V
Voltage (V)	18	Emergency	Without
Current (mA)	700	Insulation class	II
Dimmable	Yes		
Driver	Remote included		


Physical

Color	Blue
Orientation	Fixed
Weight (kg)	0.94
Spot diameter (mm)	145
Lifespan (L70 B10)	L80B50

Note

Pre-installation frame. To be ordered separately.

Kap Ø 145 Wall-Washer 1-10V



Installation Frame Trim
08.8491.BU

Installation Frame No Trim
08.8251.00

Installation Frame Trim
08.8491.GL



Installation Frame Trim
08.8491.14

Installation Frame Trim
08.8491.30