

Kap Ø 145 Wall-Washer 1-10V

■ 03.4589.GL.1V - Gold

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.




Main specifications

Number of heads	1	Net lumen (lm)	1131
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	17W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		


Optical

Lighting type	Indirect, Direct
LED type	LED array
Light distribution	Asymmetric
Optical type	Wall Washer
	Down
Beam angle (°)	55
Beam angle C90-270 (°)	59
Efficiency (lm/W)	66

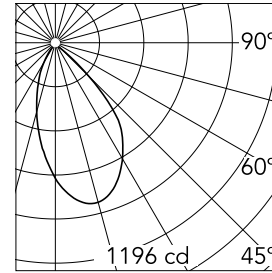

Beam Angle: 54°		
h(m)	E(lx)	D(m)
1	1196	1.13
2	299	2.26
3	133	3.39
4	75	4.52
5	48	5.65

Luminous flux luminaire
1131 lm (EXTREME CUT OFF)



*NO TRIM
**TRIM

Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	27.40	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable 1-10V		

Physical

Color	Gold
Orientation	Fixed
Weight (kg)	0.94
Spot diameter (mm)	145



Note

Pre-installation frame. To be ordered separately.


Kap Ø 145 Wall-Washer 1-10V



Installation Frame Trim
08.8491.GL



Installation Frame Trim
08.8491.30

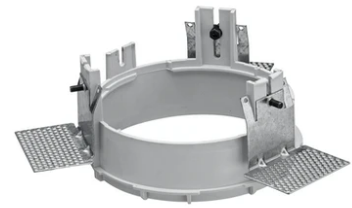

Installation Frame No Trim
08.8251.00



Installation Frame Trim
08.8491.14



Installation Frame Trim
08.8491.BU