




## Kap Ø 145 Wall-Washer Dali

■ 03.4588.CU.DA - Copper

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

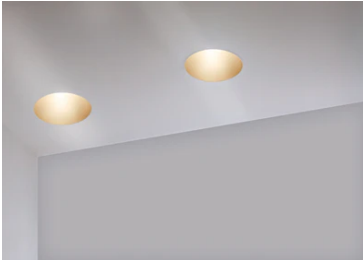

\*NO TRIM  
\*\*TRIM




### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	1170
<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling recessed
<b>Power (W)</b>	17W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Indirect, Direct
<b>LED type</b>	LED array
<b>Light distribution</b>	Asymmetric
<b>Optical type</b>	Wall Washer
	Down
<b>Beam angle (°)</b>	58
<b>Beam angle C90-270 (°)</b>	67
<b>Efficiency (lm/W)</b>	68

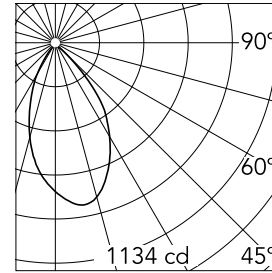

<b>Beam Angle:</b>	58°		
<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>	
1	1134	1.09	
2	284	2.18	
3	126	3.27	
4	71	4.36	
5	45	5.45	

Luminous flux luminaire  
1170 lm (EXTREME CUT OFF)

### Electrical

<b>Frequency (Hz)</b>	50/60	<b>Emergency</b>	Without
<b>Voltage (V)</b>	27.40	<b>Insulation class</b>	II
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote included		
<b>Driver type</b>	Dimmable DALI		
	1		

### Physical

<b>Color</b>	Copper
<b>Orientation</b>	Fixed
<b>Weight (kg)</b>	0.94
<b>Spot diameter (mm)</b>	145

### Note

Pre-installation frame. To be ordered separately.

## Kap Ø 145 Wall-Washer Dali



---

Installation Frame Trim  
08.8491.14



---

Installation Frame Trim  
08.8491.BU




---

Installation Frame Trim  
08.8491.GL



---

Installation Frame Trim  
08.8491.30

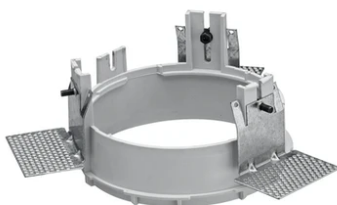

---

Installation Frame No Trim  
08.8251.00