




Kap Ø 50 Adjustable Optic Spot

■ 05.7315.BU - Blue

Recessed luminaire with LED light source. Power supply not included. Remote power supply to be installed in an accessible place.

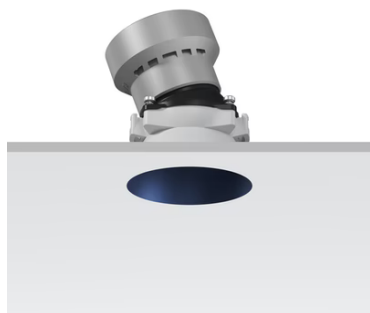


Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	565
Power (W)	7,3W	Mountings	Ceiling recessed
System power (W)	8.6	Environment	Indoor dry location
CCT (K)	3000K		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	15
Beam angle C90-270 (°)	15
UGRL	1
Efficiency (lm/W)	65



Beam Angle: 15°

h(m)	E(lx)	D(m)
1	5744	0.26
2	1436	0.52
3	638	0.78
4	359	1.04
5	230	1.30

Luminous flux luminaire
565 lm (EXTREME CUT OFF)

Electrical

Voltage (V)	35	Emergency	Without
Current (mA)	200	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable 0-10V, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		


Physical

Color	Blue	Rotation (°)	360
Orientation	Adjustable	Spot diameter (mm)	54
Recessed depth (mm)	100	Lifespan (L70 B10)	L80B50
Weight (kg)	0.16		
Tilt (°)	20		

Note

Pre-installation frame. To be ordered separately.

Kap Ø 50 Adjustable Optic Spot



Casambi Controller 220-240V. Remote Installation
60.9392



Continuous current power supply.
220/240V – 50/60Hz. Adjustable Current
150 mA – 7,2W / 200 mA – 9,5W / 250 mA
– 12W / 300 mA - 14,5W / 350 mA
- 17W/400 mA – 19,5W / 450 mA - 21,5W
/ 500 mA – 24W. Mains or push dimming
60.9421



Installation frame No Trim
08.9114.00



Continuous current power supply,
dimmable DALI 2, 220/240V – 50/60Hz,
200mA – 20W
60.9604



Non dimmable continuous current
power supply of 220/240V – 50/60Hz
with power current selected through
adjustable with switch 200 mA – 8,5W /
300 mA – 13W / 350 mA – 15W / 400 mA
– 17,5W / 450 mA – 19,5W / 500 mA –
22W
60.9160



Continuous current power supply, 0-
10V dimmable, 220/240V – 50/60Hz,
200mA – 20W
60.9483