

## Kap Ø105 Fixed Optic Spot

05.7105.CU - Copper


Recessed luminaire with LED light source. Remote transformer not included. Pre-installation frame. To be ordered separately.

### Main specifications

|                  |       |             |                  |
|------------------|-------|-------------|------------------|
| Number of heads  | 1     | CRI         | 90               |
| Lamp category    | LED   | Mountings   | Ceiling recessed |
| Power (W)        | 23W   | Environment | Indoor           |
| System power (W) | 25.9  |             |                  |
| CCT (K)          | 3000K |             |                  |

### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | LED array |
| Light distribution     | Symmetric |
| Optical type           | Spot      |
| Beam angle (°)         | 17        |
| Beam angle C90-270 (°) | 17        |



Beam Angle: 17°

h(m) E(lx) D(m)

1 14445 0.30

2 3611 0.59

3 1605 0.89

4 903 1.18

5 578 1.48

Luminous flux luminaire  
2275 lm (EXTREME CUT OFF)


### Electrical

|              |                                                                                                |                  |         |
|--------------|------------------------------------------------------------------------------------------------|------------------|---------|
| Voltage (V)  | 34                                                                                             | Emergency        | Without |
| Current (mA) | 650                                                                                            | Insulation class | III     |
| Dimmable     | Yes                                                                                            |                  |         |
| Driver       | Remote                                                                                         |                  |         |
| Driver type  | Electronic,<br>Electronic dimmable,<br>Electronic dimmable 1-<br>10V, Electronic dimmable DALI |                  |         |

### Physical

|                     |        |
|---------------------|--------|
| Color               | Copper |
| Orientation         | Fixed  |
| Recessed depth (mm) | 150    |
| Weight (kg)         | 0,48   |
| Spot diameter (mm)  | 105    |

## Kap Ø105 Fixed Optic Spot

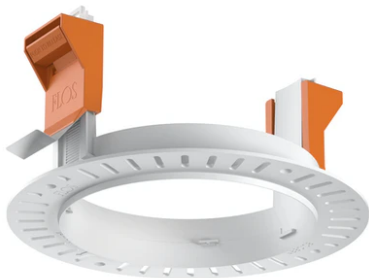

Installation frame No Trim  
08.0132.00



Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA – 15W / 400mA – 17W / 450mA – 19W / 500mA – 22W / 550mA – 24W / 600mA – 26W / 650mA – 28W / 700mA – 30W no regulable  
60.9592



Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 36W – 700 mA  
60.9439



Continuous current supply source of 240V – 50/60Hz with dimmable DALI 2  
60.9186



Continuous current power supply, dimmable Casambi, 220/240V – 50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207