



## Kap Ø105 Wall-Washer

■ 05.7121.74 - Black

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Pre-installation frame. To be ordered separately.

Recessed luminaire with LED light source. Remote electronic transformer 220/240V not included. Pre-installation frame. To be ordered separately.

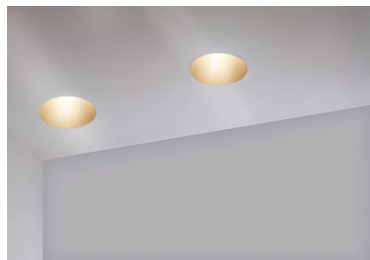


### Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	1898
Power (W)	25.9W	Mountings	Ceiling recessed
System power (W)	25.9	Environment	Indoor
CCT (K)	3000K		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Asymmetric
Optical type	Wall-washer
Beam angle (°)	28
Beam angle C90-270 (°)	35
Efficiency (lm/W)	73

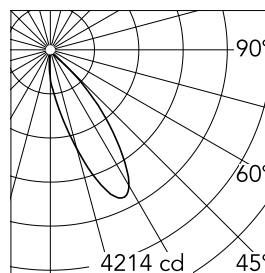

Beam Angle: 28°

h(m)	E(lx)	D(m)
1	4214	0.63
2	1054	1.26
3	468	1.89
4	263	2.52
5	169	3.16

Luminous flux luminaire  
1898 lm (EXTREME CUT OFF)


### Electrical

Voltage (V)	34	Emergency	Without
Current (mA)	650	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI		

### Physical

Color	Black
Orientation	Fixed
Recessed depth (mm)	134
Weight (kg)	0,5
Spot diameter (mm)	105

## Kap Ø105 Wall-Washer

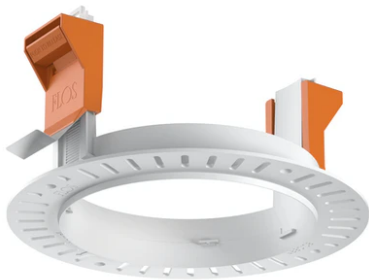

Installation frame No Trim  
08.0132.00



Non dimmable continuous current  
power supply. 15-30W, 220/240V  
-50/60Hz with power current selected  
through adjustable switch.  
60.9592



Continuous current power supply of  
13-20W, 110\*/240V – 50/60Hz with  
power current selected through  
adjustable switch. 1-10V or push  
dimming.  
60.9188



Constant Current Power Supply for  
LED. Dimmable DALI. 10-20W  
60.8847



Continuous current power supply,  
dimmable Casambi, 220/240V –  
50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207