

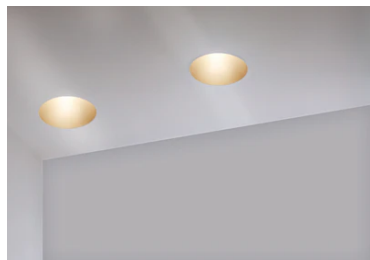


## Kap Ø145 Wall-Washer

 03.4498.GLB - Gold

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.



\*NO TRIM  
\*\*TRIM




## Main specifications

Number of heads	1	Net lumen (lm)	871
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	17W	Environment	Indoor
CCT (K)	2700K		
CRI	98		

## Optical

Lighting type	Indirect, Direct
LED type	Phosphor LED
Light distribution	Asymmetric
Optical type	Wall-washer
Beam angle (°)	56
Beam angle C90-270 (°)	60
Efficiency (lm/W)	51

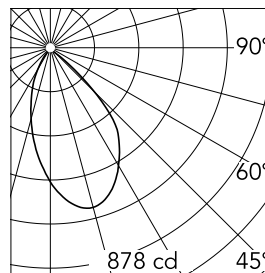

Beam Angle: 56°

h(m)	E(lx)	D(m)
1	878	1.18
2	219	2.37
3	98	3.55
4	55	4.73
5	35	5.92

Luminous flux luminaire  
871 lm (EXTREME CUT OFF)

## Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	22.30	Insulation class	II
Dimmable	No		
Driver	Remote		
Driver type	Electronic		

## Physical

Color	Gold
Orientation	Fixed
Weight (kg)	0.94
Spot diameter (mm)	145

## Note

Pre-installation frame. To be ordered separately.


Kap Ø145 Wall-Washer



Installation Frame Trim  
08.8491.BU



Installation Frame Trim  
08.8491.14

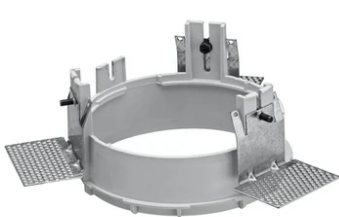

Installation Frame No Trim  
08.8251.00



Installation Frame Trim  
08.8491.30



Installation Frame Trim  
08.8491.GL