




## Kap Ø145 Wall-Washer

■ 03.4589.BU - Blue

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

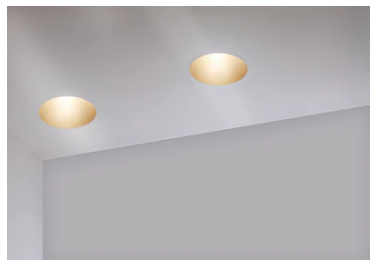

\*NO TRIM  
\*\*TRIM




## Main specifications

|                 |       |                |                  |
|-----------------|-------|----------------|------------------|
| Number of heads | 1     | Net lumen (lm) | 980              |
| Lamp category   | LED   | Mountings      | Ceiling recessed |
| Power (W)       | 17W   | Environment    | Indoor           |
| CCT (K)         | 2700K |                |                  |
| CRI             | 90    |                |                  |

## Optical

|                        |                  |
|------------------------|------------------|
| Lighting type          | Indirect, Direct |
| LED type               | LED array        |
| Light distribution     | Asymmetric       |
| Optical type           | Wall-washer      |
| Beam angle (°)         | 56               |
| Beam angle C90-270 (°) | 63               |
| Efficiency (lm/W)      | 57               |



Beam Angle: 56°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 972   | 1.17 |
| 2    | 243   | 2.34 |
| 3    | 108   | 3.51 |
| 4    | 61    | 4.68 |
| 5    | 39    | 5.85 |

Luminous flux luminaire  
980 lm (EXTREME CUT OFF)

## Electrical

|                |            |                  |         |
|----------------|------------|------------------|---------|
| Frequency (Hz) | 50/60      | Emergency        | Without |
| Voltage (V)    | 27.40      | Insulation class | II      |
| Dimmable       | No         |                  |         |
| Driver         | Remote     |                  |         |
| Driver type    | Electronic |                  |         |


## Physical

|                    |       |
|--------------------|-------|
| Color              | Blue  |
| Orientation        | Fixed |
| Weight (kg)        | 0.94  |
| Spot diameter (mm) | 145   |

## Note

Pre-installation frame. To be ordered separately.

Kap Ø145 Wall-Washer



Installation Frame Trim  
08.8491.BU

Installation Frame Trim  
08.8491.14

Installation Frame No Trim  
08.8251.00



Installation Frame Trim  
08.8491.30

Installation Frame Trim  
08.8491.GL